

WAAS CH 61213 W31A	APP CRS 313°	Rwy Ldg TDZE Apt Elev	7000 1020 1031
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31
ST CLOUD RGNL (STC)

RNP APCH - GPS.



⚠ Baro-VNAV and VDP NA when using Little Falls altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS when using Little Falls altimeter setting, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1 ¾ SM and LNAV Cats C and D visibility to 1 ¾ SM. When local altimeter setting not received, use Little Falls altimeter setting, increase LPV DA to 1296 feet, increase LNAV/VNAV DA to 1503 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cat C and D ¼ SM, and Circling visibility Cat C and D ¼ SM. For inop ALS, increase LNAV/VNAV visibility all Cats to 1 ¾ SM.

MALSR

A5

MISSED APPROACH:
Climb to 3000 direct
WELOK and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
------------------------	---	---	--------------------------

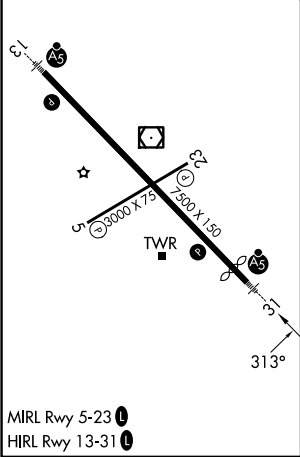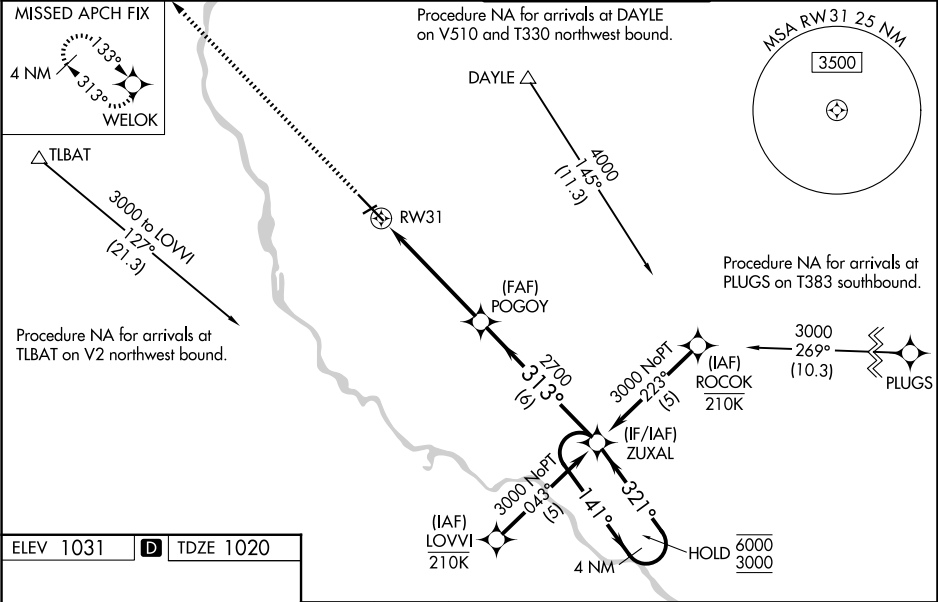

3000

↑

WELOK

✦

POGOY

2700

1.2 NM to RW31

1.2

3.9 NM

6 NM

ZUXAL

4 NM Holding Pattern

141° → 6000

← 321° 3000

313°

2700

RW31

GP 3.00°

TCH 50

CATEGORY	A	B	C	D
LPV DA	1220-1/2 200 (200-1/2)			
LNAV/VNAV DA	1427-3/4 407 (400-3/4)			
LNAV MDA	1460-1/2 440 (500-1/2)	1460-3/4 440 (500-3/4)		
CIRCLING	1500-1 469 (500-1)	1620-1 1/2 589 (600-1 1/2)	1860-2 3/4 829 (900-2 3/4)	

NC-1, 25 DEC 2025 to 22 JAN 2026

NC-1, 25 DEC 2025 to 22 JAN 2026