

WAAS CH 99710 W32A	APP CRS 319°	Rwy Idg TDZE 1039 Apt Elev 1039
--	------------------------	---

RNAV (GPS) RWY 32

BENSON MUNI (BBB)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 32 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Appleton altimeter setting. When local altimeter setting not received, use Appleton altimeter setting and increase all DA and MDA 40 feet.

MISSED APPROACH: Climb to 2700 direct DOSCA and hold.

AWOS-3PT 118.45	MINNEAPOLIS CENTER 125.5 323.1	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

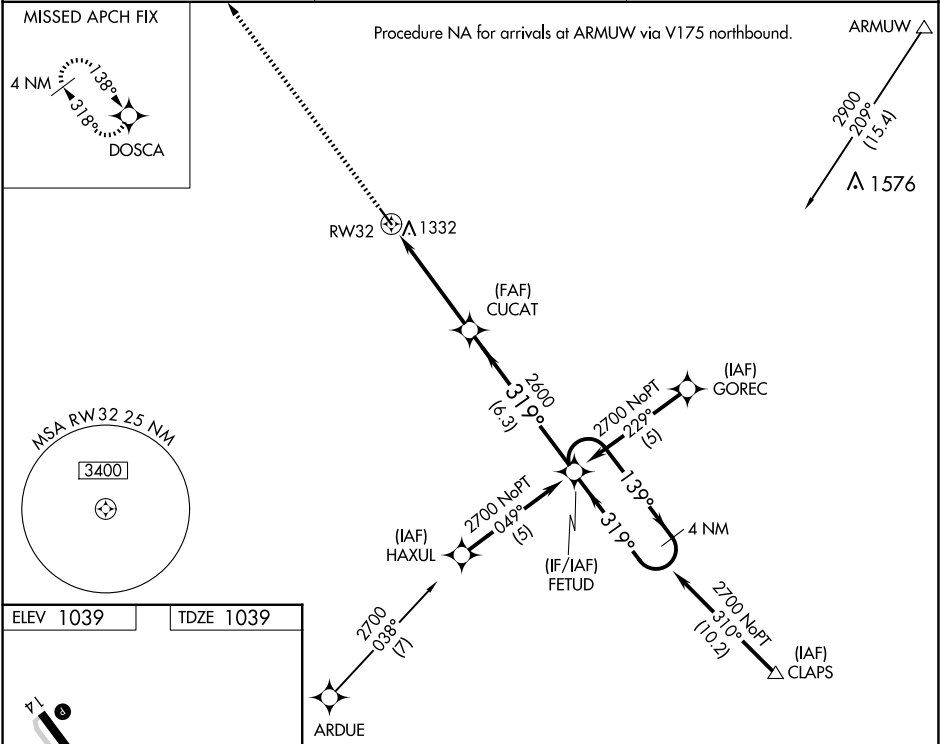

4000x75

2600x75

319°

MIRL Rwy 14-32

REIL Rws 14 and 32

2700 ↑ DOSCA ✦		CUCAT ✦		FETUD 4 NM Holding Pattern	
RW32 ⋯		2600 ✦		2700 139° → ← 319° GP 3.00° TCH 41	
4.7 NM		6.3 NM			
CATEGORY	A	B	C	D	
LPV DA	1426-1½	387 (400-1½)	NA		
LNAV/VNAV DA	1710-2½	671 (700-2½)	NA		
LNAV MDA	1700-1	661 (700-1)	NA		