

WAAS CH 69301 W36A	APP CRS 003°	Rwy Ldg 4701 TDZE 2310 Apt Elev 2314
--	------------------------	---


RNAV (GPS) RWY 36
BREWSTER FLD (HDE)

RNP APCH - GPS.

T Circling NA to Rwy 11 and 29. When local altimeter setting not received, use EAR altimeter setting and increase LPV DA to 2637 feet and all visibilities $\frac{1}{4}$ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D $\frac{1}{8}$ SM, and Circling visibility Cat C/D $\frac{1}{4}$ SM. VDP NA when using EAR altimeter setting.

MISSED APPROACH: Climb to 4000 direct YETUP and hold.


AWOS-3 121.325	DENVER CENTER 132.7 226.675	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

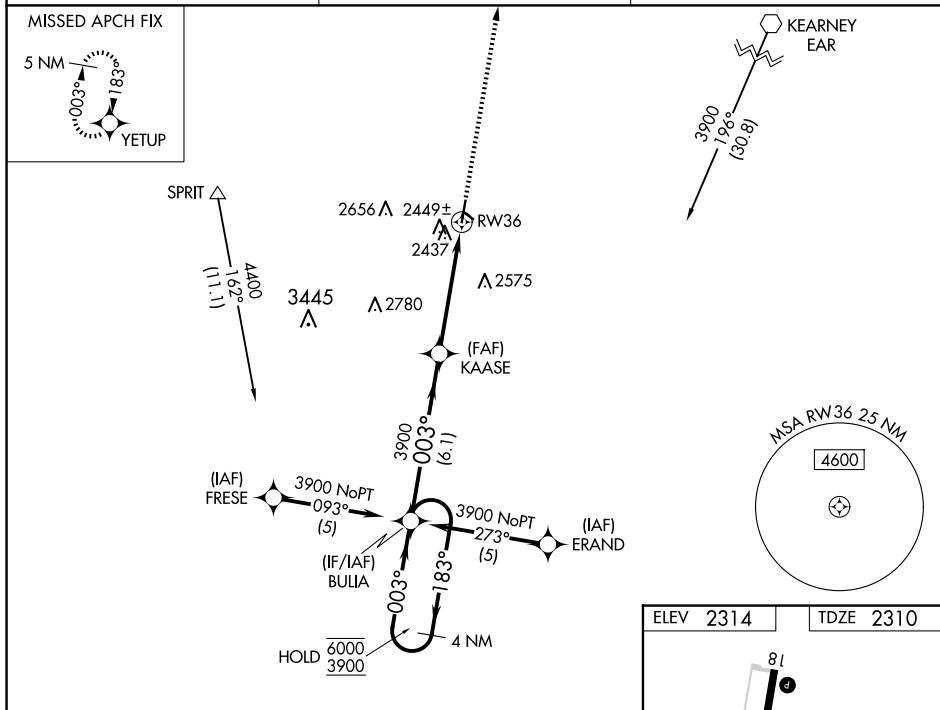

YETUP VORTAC Instrument Approach Chart

- Holding Pattern:** 4 NM Holding Pattern.
- Altitudes:** 6000, 3900, GP 3.00°, TCH 40.
- Angles:** 183° (inbound), 003° (outbound).
- Distances:** 6.1 NM, 3.5 NM, 1.3 NM.
- Obstacles:** KAASE (obstacle symbol), RW36 (runway).
- Navigation Aids:** BULUA, KAASE, RW36.

CATEGORY	A	B	C	D
LPV DA	2560-1 250 (300-1)			
LNAV MDA	2760-1 450 (500-1)		2760-1 $\frac{3}{8}$ 450 (500-1 $\frac{3}{8}$)	
CIRCLING	2840-1 526 (600-1)	2880-1 566 (600-1)	3020-2 706 (800-2)	3020-2 $\frac{1}{4}$ 706 (800-2 $\frac{1}{4}$)

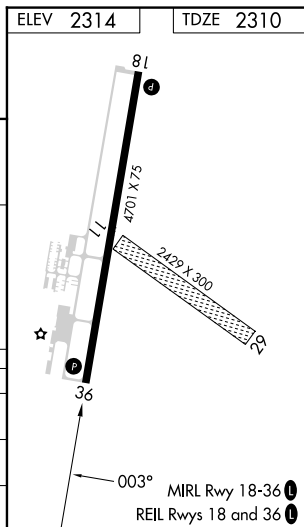

RNAV (GPS) RWY 36