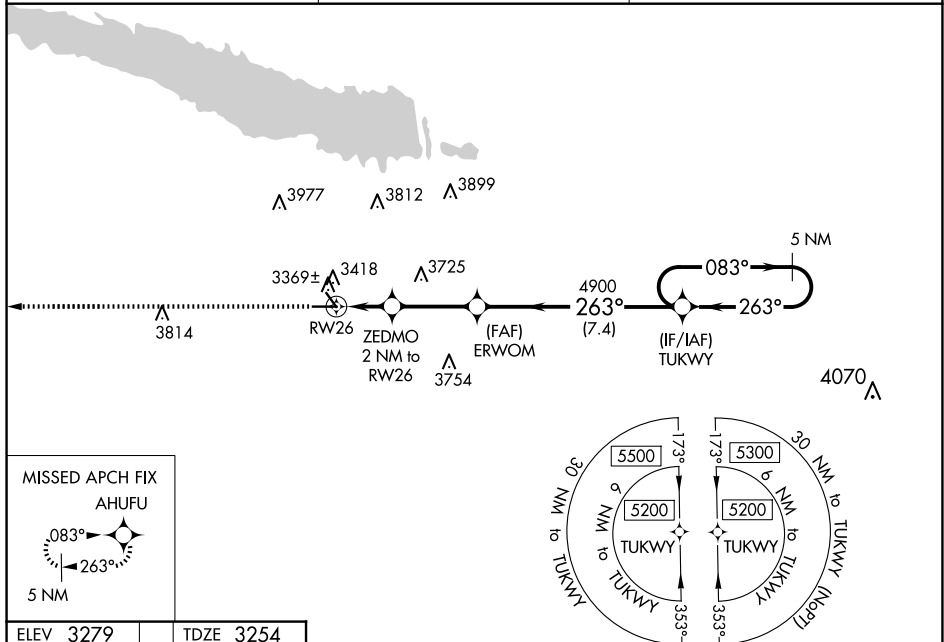


Rwy Idg	5102
TDZE	3254
Apt Elev	3279



RNAV (GPS) RWY 26
SEARLE FLD (OGA)

T When local altimeter setting not received, use Imperial altimeter setting and increase all DA 86 feet and all MDA 100 feet, increase LPV all Cats visibility $\frac{1}{8}$ SM, INNAV/VNAV all Cats and Circling Cat B visibility $\frac{1}{4}$ SM. VDP and Baro-VNAV NA when using Imperial altimeter setting. For uncompensated Baro-VNAV systems, INNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH:
Climb to 5300 direct
AHUFU and hold.

UNICOM
122.8 (CTAF) 

TDZE 3254

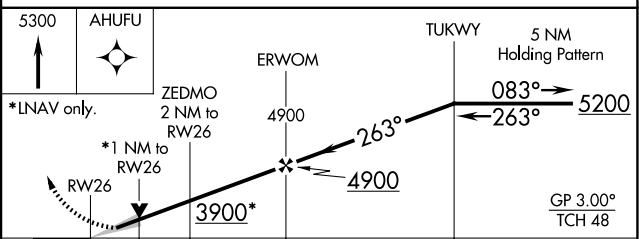

CATEGORY		A	B	C	D
LPV	DA	3504-1	250 (300-1)	NA	
LNAV/ VNAV	DA	3540-1	286 (300-1)	NA	
LNAV	MDA	3620-1	366 (400-1)	NA	
CIRCLING		3940-1 661 (700-1)	4000-1 721 (800-1)	NA	

NC-2 25 DEC 2025 to 22 JAN 2026