


WAAS CH 45634 W34A	APP CRS 342°	Rwy Ldg TDZE Apt Elev	3902 858 862
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 34

INDIANAPOLIS RGNL (MQJ)

RNP APCH.	MISSED APPROACH: Climb to 2500 direct AYAGO and hold.
▼ ▲ NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).	

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	UNICOM 122.975 (CTAF) 0
----------------------------	---	--

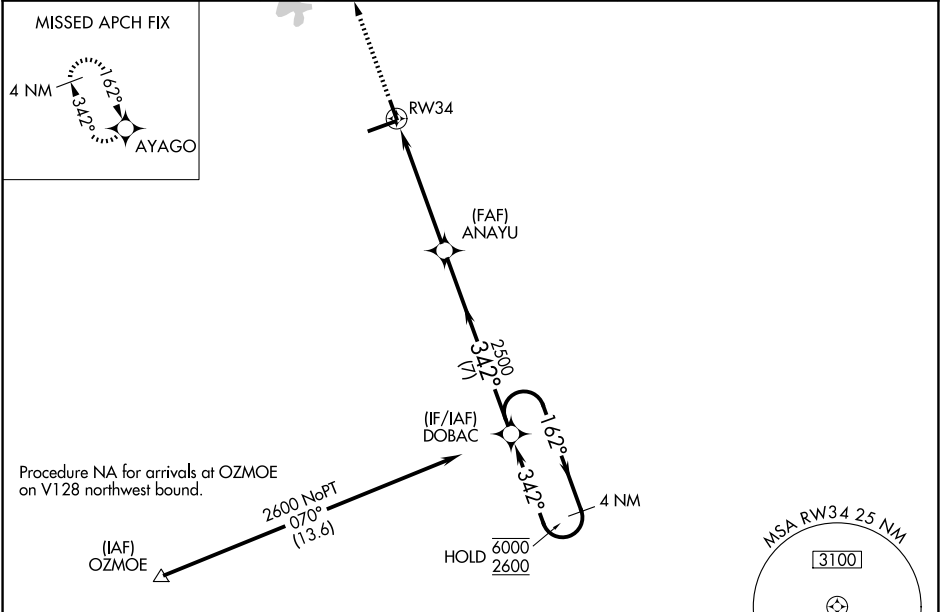

ELEV 862

TDZE 858

REIL Rwy 7 and 34

HIRL Rwy 7-25 **0**

MIRL Rwy 16-34

2500

AYAGO

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 49).

4 NM Holding Pattern

ANAYU

2500

342°

162°

6000

2600

GP 3.00° TCH 33

* LNAV only.

* 1.3 NM to RW34

1.3 NM

3.8 NM

7 NM

CATEGORY	A	B	C	D
LPV DA	1058- ³ / ₄ 200 (200- ³ / ₄)			
LNAV/VNAV DA	1119- ⁷ / ₈ 261 (300- ⁷ / ₈)			
LNAV MDA	1320-1	462 (500-1)	1320-1 ³ / ₈	462 (500-1 ³ / ₈)
CIRCLING	1340-1	478 (500-1)	1360-1 ¹ / ₂ 498 (500-1 ¹ / ₂)	1660-2 ¹ / ₂ 798 (800-2 ¹ / ₂)