

WAAS CH 90200 W28A	APP CRS 277°	Rwy Ldg TDZE Apt Elev	5002 599 602
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

SAGINAW COUNTY/H W BROWNE (HYX)

⚠


⚠

Inop table does not apply to LPV DA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling NA for Cat C north of Rwy 10-28. Circling Rwy 5, 23 NA at night. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM.

MALSF

MISSED APPROACH:
Climb to 2800 direct
CULAK and hold.

AWOS-3PT 118.325	GREAT LAKES APP CON★ 120.95 235.625	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

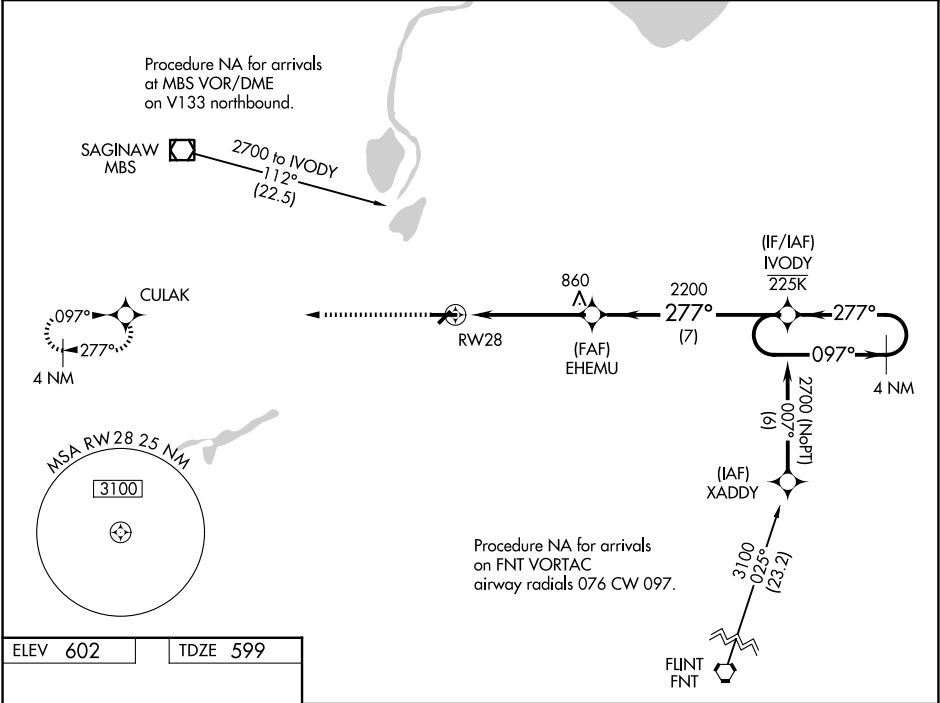

ELEV 602

TDZE 599

2800

CULAK

277°

10

5002 X 100

7953 X 60

277°

1.4

3.5 NM

7 NM

2200

2200

2200

277°

097°

2700

GP 3.00°

TCH 44

4 NM

Holding Pattern

*LNAV only

*1.4 NM to RW28

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 44).

CATEGORY	A	B	C	D
LPV DA	804-¾ 205 (300-¾)			NA
LNAV/VNAV DA	849-¾ 250 (300-¾)			NA
LNAV MDA	1080-¾ 481 (500-¾)		1080-1½ 481 (500-1½)	NA
CIRCLING	1100-1 498 (500-1)		1460-2½ 858 (900-2½)	NA