
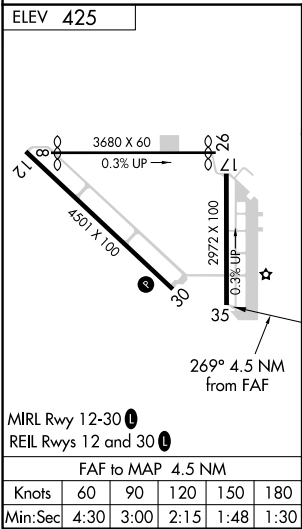


VORTAC EHF 115.4 Chan 101	APP CRS 269°	Rwy Idg TDZE Apt Elev 425	N/A N/A 425
---	------------------------	---	--

VOR-A
SHAFTER-MINTER FLD (MIT)

NA Circling to Rwy 17, 35, 8 and 26 NA at night. When local altimeter setting not received, use Bakersfield altimeter setting and increase all MDAS 40 feet and increase Cat C visibility to 1¾.	MISSED APPROACH: Climb to 4000 on EHF VORTAC R-269 to SCRAP INT/EHF 14.7 DME and hold, continue climb-in-hold to 4000.
--	--

AWOS-3 121.125	BAKERSFIELD APP CON ★ 126.45 270.3	CTAF 122.90
--------------------------	--	-----------------------

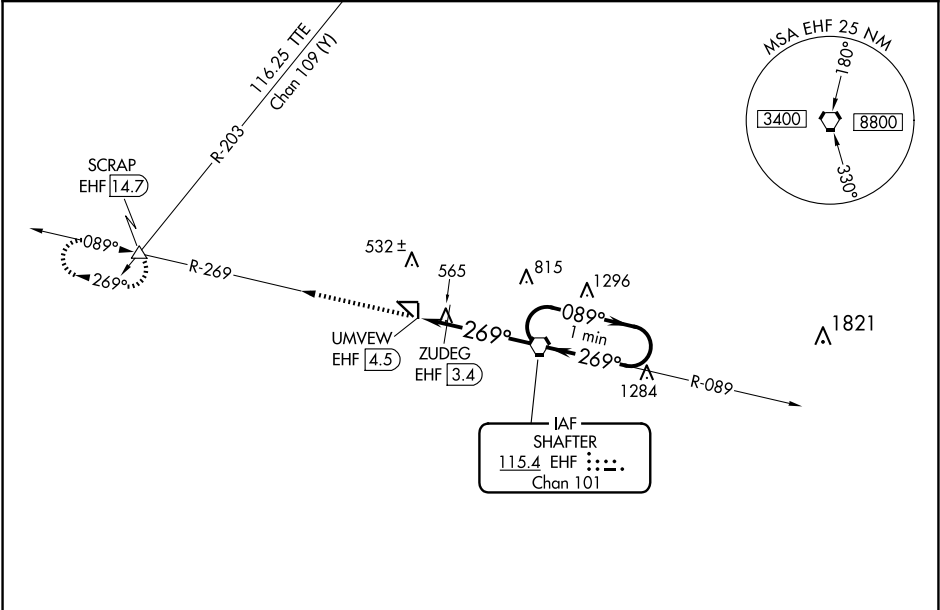

4000	SCRAP	One Minute Holding Pattern			
EHF R-269	ZUDEG EHF 3.4	EHF VORTAC			
UMVEW EHF 4.5	269°	2600	2900	*1040 when using Bakersfield altimeter setting.	
1.1 NM		3.4 NM			
CATEGORY	A	B	C	D	
CIRCLING	1000-1 575 (600-1)		1000-1½ 575 (600-1½)		NA
ZUDEG FIX MINIMUMS					
CIRCLING	900-1 475 (500-1)		940-1½ 515 (600-1½)		NA

SW-3, 25 DEC 2025 to 22 JAN 2026

SW-3, 25 DEC 2025 to 22 JAN 2026