


WAAS CH 40319 W31A	APP CRS 317°	Rwy Idg TDZE 1140 Apt Elev 1140	4002
--	------------------------	---	-------------


RNAV (GPS) RWY 31
LITCHFIELD MUNI (LJF)

RNP APCH - GPS. Baro-VNAV NA when using Hutchinson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When Local altimeter setting not received, use Hutchinson altimeter setting: increase LPV DA to 1435 feet; increase LNAV/VNAV DA to 1594 feet; increase all MDA 60 feet and LNAV and Circling Cat C visibility ¼ SM. VDP NA with Hutchinson altimeter setting.	MISSED APPROACH: Climb to 2900 direct UN1YI and hold.
--	--

AWOS-3 119.65	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9 0
-------------------------	--	------------------------

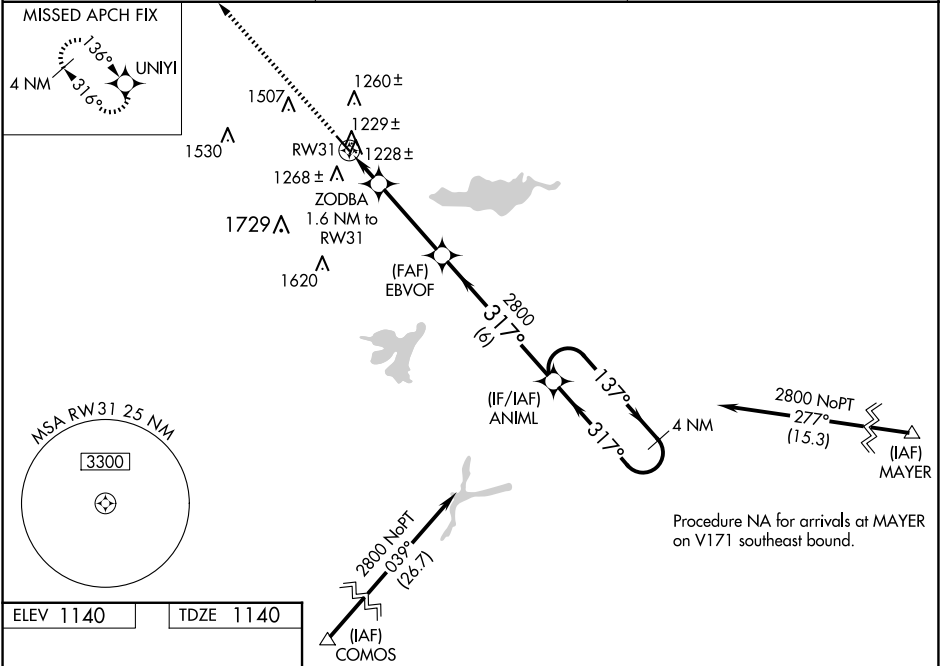

ELEV 1140	TDZE 1140
-----------	-----------

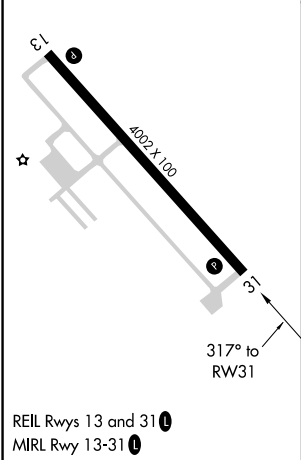

2900 ↑ * LNAV only	UN1YI ✳️	EBVOF 2800 ANIML 4 NM Holding Pattern ZODBA 1.6 NM to RW31 * 0.9 NM to RW31 RW31 0.9 0.7 3.4 NM 6 NM 137° 137° 317° 317° 2800 2800 1680* GP 3.00° TCH 39			
CATEGORY	A	B	C	D	
LPV DA	1389-1 249 (300-1)				
LNAV/VNAV DA	1548-1½ 408 (500-1½)				
LNAV MDA	1480-1 340 (400-1)				
CIRCLING	1600-1	460 (500-1)	1860-2 720 (800-2)	2080-3 940 (1000-3)	

NC-1, 25 DEC 2025 to 22 JAN 2026

NC-1, 25 DEC 2025 to 22 JAN 2026