

WAAS CH 69536 W22A	APP CRS 218°	Rwy Idg 3700 TDZE 354 Apt Elev 354
--	------------------------	---


RNAV (GPS) RWY 22
WASILLA (IYS) (PAWS)

RNP APCH.

- T** Circling NA to Rwy 45 and 22S. Baro-VNAV and VDP NA when using Palmer altimeter setting. Rwy 22 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Palmer altimeter setting and increase all DA 46 feet, MDA 60 feet and all visibilities $\frac{1}{8}$ mile.

MISSED APPROACH:
Climb to 1000 then
climbing right turn to
3000 direct BGQ
VORTAC and hold.

AWOS-3P	ANCHORAGE APP CON	CTAF
135.25	119.1 363.2	122.8 0

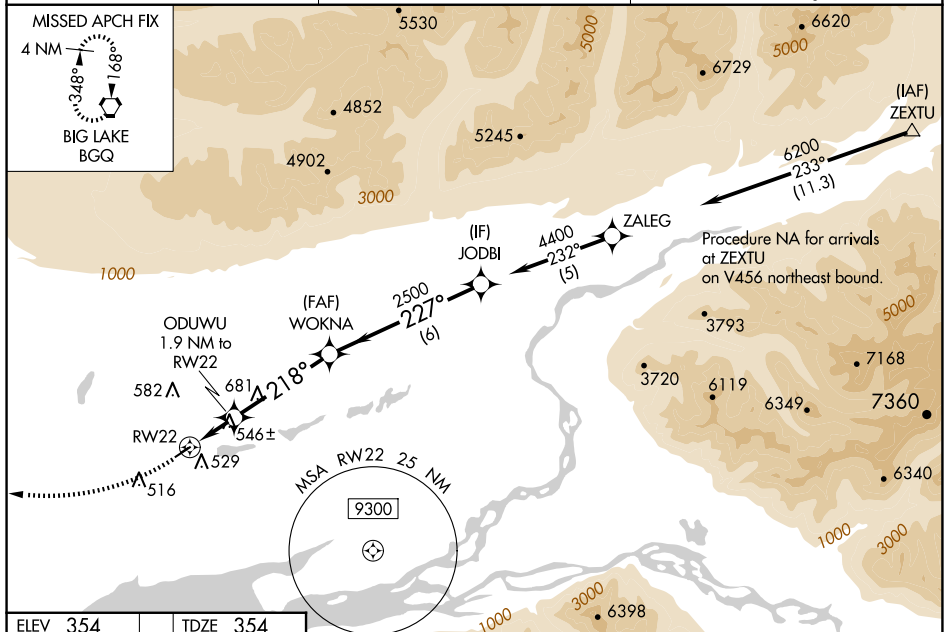

ELEV 354		TDZE 354
----------	--	----------

