


WAAS CH 61247 W14B	APP CRS 138°	Rwy Ldg 8006 TDZE 459 Apt Elev 459
--	------------------------	---

RNAV (GPS) Y RWY 14R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP APCH - GPS.			ALSF-1	MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct NEWAT and hold.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1¼ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.				
ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	

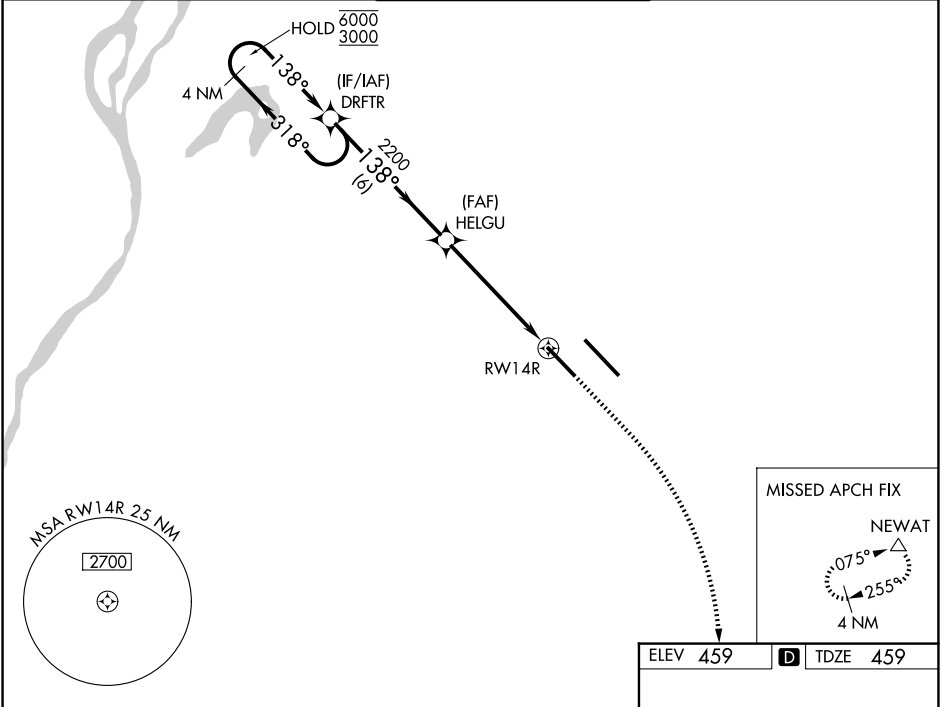

4 NM Holding Pattern		DRFTR	1100	3000	NEWAT
6000 ← 318°		DRFTR	↑	↘	△
3000 → 138°		HELGU			
GP 3.00°		2200	1.7 NM to RWY 14R		
TCH 51		HELGU	2200		
		6 NM	3.6 NM	1.7 NM	
CATEGORY	A	B	C	D	
LPV DA*	659/24		200 (200-½)		
LNAV/VNAV DA	1035-1¼		576 (600-1¼)		
LNAV MDA	1060/24	601 (700-½)	1060-1⅔	601 (700-1⅔)	
CIRCLING	1060-1 601 (700-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)	

