

WAAS CH 73006 W03A	APP CRS 032°	Rwy Ldg 10165 TDZE 5328 Apt Elev 5344
--	------------------------	--

RNAV (GPS) RWY 3

CASPER/NATRONA COUNTY INTL (CPR)

▼


▲

For inoperative MALSR, increase LPV all Cats visibility to 1 mile.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 38°C (100°F).
DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 7500
direct KIVSE and via track 022° to
DDY VOR/DME and hold.

ATIS 126.15	CASPER APP CON ★ 120.65 354.1	CASPER TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	UNICOM 122.95
-----------------------	---	---	-------------------------	--------------------------------	-------------------------

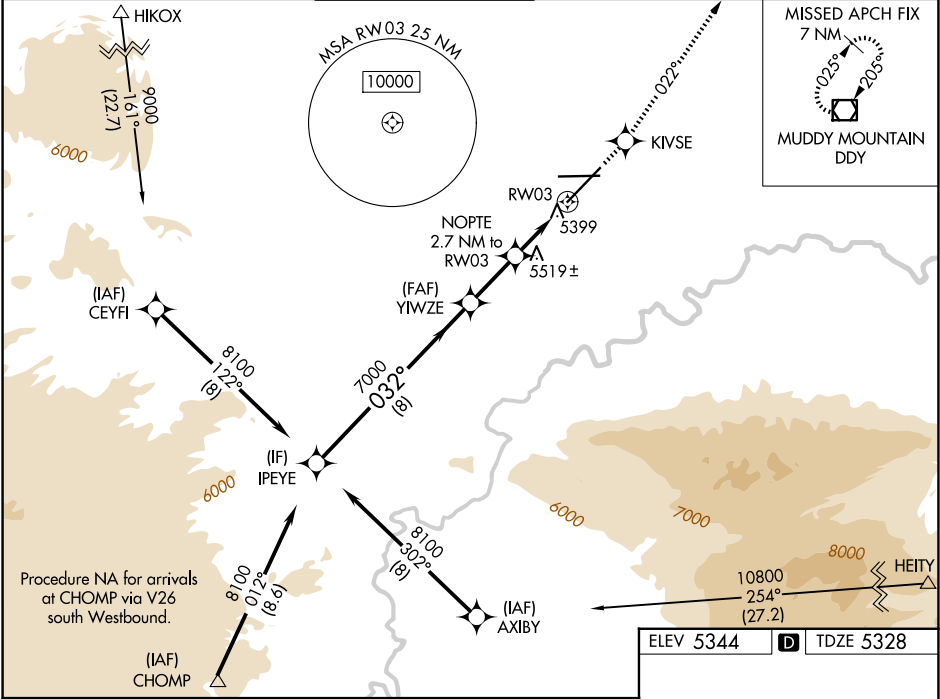

Procedure Turn NA	7500 KIVSE tr 022° DDY			
	*LNAV only			
	8100 032° 7000 *6240 NOPT 2.7 NM to RW03 *1.3 NM to RW03 RW03			
	8 NM 2.3 NM 1.4 NM 1.3 NM			
CATEGORY	A	B	C	D
LPV DA	5643/24		315 (300-½)	
LNAV/VNAV DA	5691/40		363 (400-¾)	
LNAV MDA	5780/24	452 (500-½)	5780/40 452 (500-¾)	5780/50 452 (500-1)
CIRCLING	5780-1 436 (500-1)	5800-1 456 (500-1)	5860-1½ 516 (600-1½)	6200-2¾ 856 (900-2¾)

