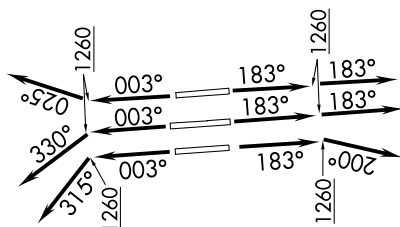


CHARLOTTE, NORTH CAROLINA

$$Z \leftarrow$$


Standard with minimum climb of 500' per NM to 1260.
Standard with minimum climb of 500' per NM to 1400.

NOTE: Chart not to scale.

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE:
8000


NOTE: For turbo jets only.

NOTE: If unable to accept climb rates, advise ATC on initial contact.

NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.

NOTE: Accelerate to 250K, if unable advise ATC. Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

TAKEOFF MINIMUMS
Rwys 18L/C/R, 36C/R:
Rwy 36L:

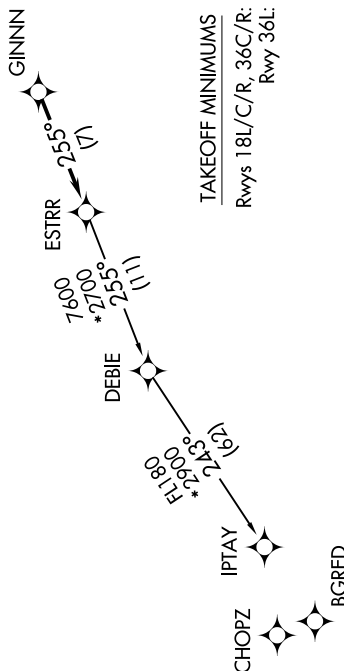

(CONTINUED ON FOLLOWING PAGE)

SE-2, 22 JAN 2026 to 19 FEB 2026