

EC-1, 22 JAN 2026 to 19 FEB 2026

TOP ALTITUDE:
3000

RADAR required. DME required.

ATIS 124.875
GND CON 121.85
DETROIT CITY TOWER 121.3 257.8


TAKEOFF MINIMUMS
Rwys 15, 33: Standard.

NOTE: For use by non-RNAV equipped aircraft only.
NOTE: When using this departure, file the appropriate depicted departure fix and route. Aircraft over HARWL must file FL220 and below. Aircraft landing Cleveland (CLE) must file MAARS transition. Turbojet departures at/above 10000, maintain 280K until advised by ATC. If unable, advise ATC prior to departure.

SPECIAL INSTRUCTIONS:

For appropriate departure control frequency, see graphic. Use frequency depicted within the sector where first navaid/fix for your route is located (sectors indicated by dashed lines; frequencies in dashed box within).

(CONTINUED ON FOLLOWING PAGE)

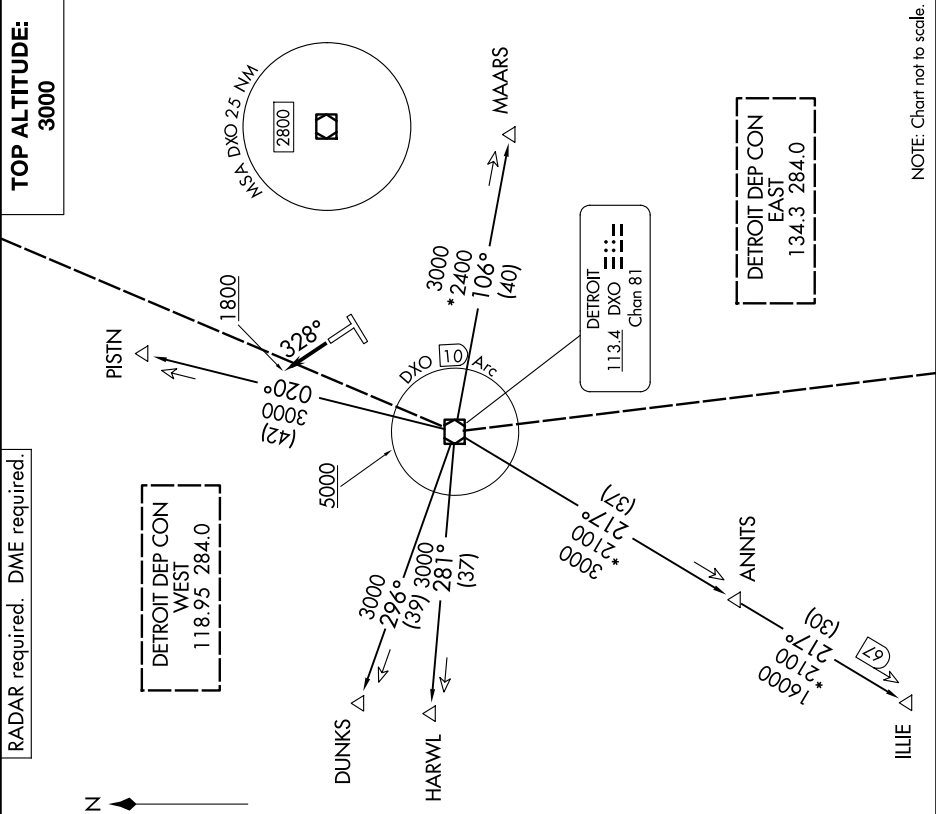

NOTE: Chart not to scale.

EC-1, 22 JAN 2026 to 19 FEB 2026