



LOC/DME I-PRQ	APP CRS	Rwy Ldg
111.3	131°	6568
Chan 50		TDZE 46
		Apt Elev 46

ILS or LOC RWY 13R

WILLIAM P HOBBY (HOU)

RADAR or DME required for LOC only. RADAR required for procedure entry.	MALSR	MISSED APPROACH: Climb to 800 then climbing right turn to 2200 direct VUH VOR/DME.
Inop table does not apply to S-ILS Rwy 13R. Rwy 13R helicopter visibility reduction below ¾ SM NA. For inop ALS, increase S-LOC 13R Cats A/B visibility to RVR 5500, Cats C/D/E to 1¾ SM.		

D-ATIS	HOUSTON APP CON	HOBBY TOWER	GND CON
124.6	120.05 379.1 (E) 124.35 316.15 (W)	118.7 256.9	121.9

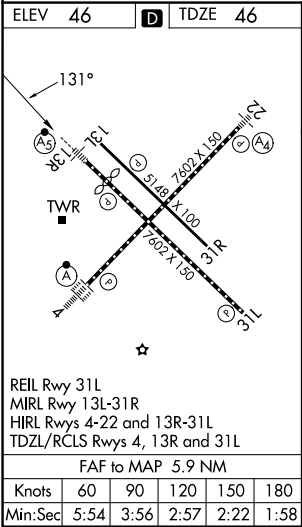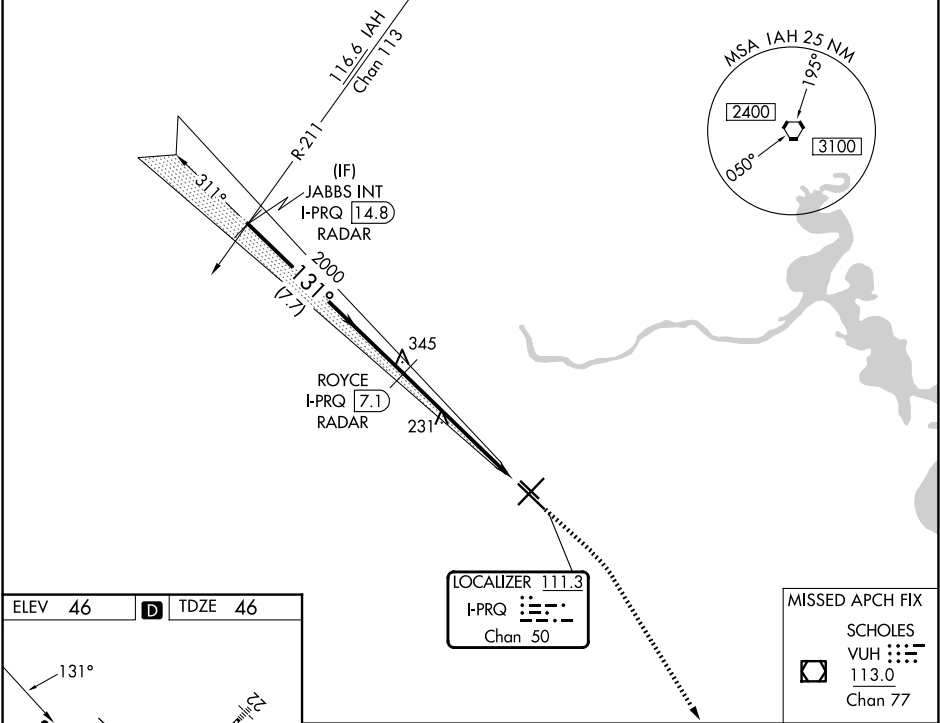

	JABBS INT I-PRQ 14.8 RADAR	ROYCE I-PRQ 7.1 RADAR	800	2200	VUH
			I-PRQ 2.6		I-PRQ 1.3
	2000	2000			
GS 3.00° TCH 49	7.7 NM	4.5 NM	1.4 NM		
CATEGORY	A	B	C	D	E
S-ILS 13R	296/40 250 (300-¾)				
S-LOC 13R	540/40	494 (500-¾)	540/50	494 (500-1)	540/60 494 (500-1¼)
CIRCLING	540-1	494 (500-1)	740-2¼	694 (700-2¼)	860-3 814 (900-3)