


HI-TACAN Z RWY 21L


TACAN LSV Chan 12	APCH CRS 210°	Rwy ldg 21L 10,051 TDZE 1865 Arpt Elev 1869	Rwy ldg 21R 10,120 TDZE 1869	AL-227 [USAF]	NELLIS AFB (KLSV)
⚠ * When ALS inop, increase CAT CDE vis to 1½ miles. ** Circling not authorized SE of Rwy 3R-21L.					

ATIS 270.1	APP CON 124.95 273.55	TOWER 132.55 327.0	GND CON 121.8 275.8	CLNC DEL 120.9 289.4
----------------------	---------------------------------	------------------------------	-------------------------------	--------------------------------

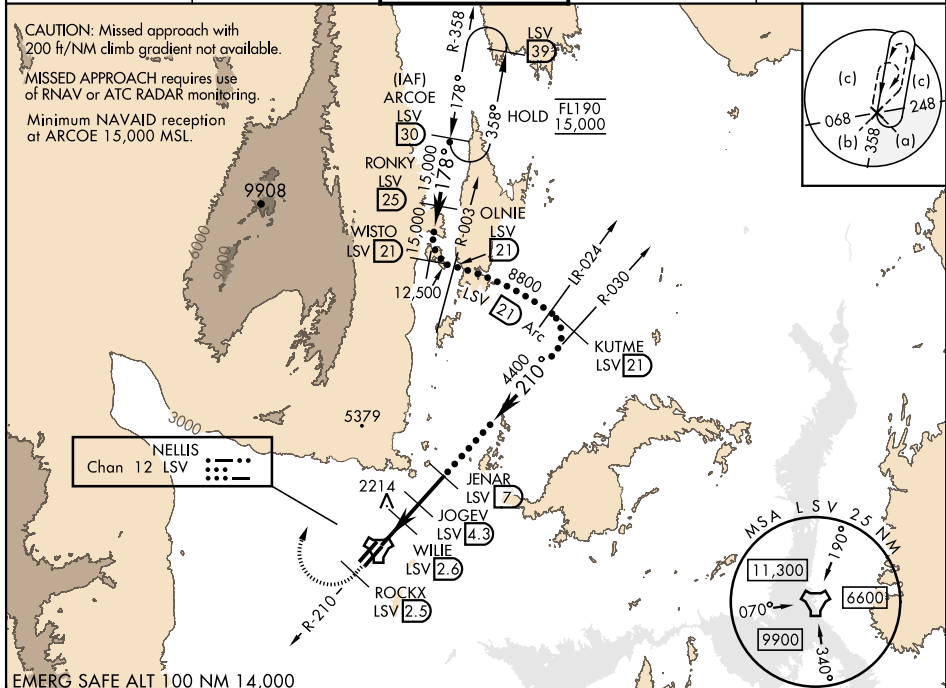

Knots	60	120	180	240	300	360
V/V(fpm)	364	728	1092	1456	1820	2184
Min climb of 364 ft/NM to 9400 - Controlling Obstacle 5739						

15,000 LSV R-210	ROCKX LSV 2.5	ARCOE R-358 30	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 54).	KUTME R-030 21
------------------	---------------	----------------	--	----------------

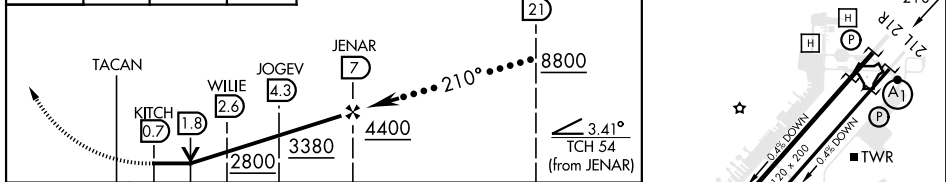

CATEGORY	C	D	E
S-21L *	2440-1¼	575 (600-1¼)	
SIDESTEP 21R	2440-1½	571 (600-1½)	
C CIRCLING **	2560-2 691 (700-2)	2840-3 971 (1000-3)	3140-3 1271 (1300-3)

HI-TACAN Z RWY 21L