

# BNGOS FOUR DEPARTURE (RNAV) Departure Routes


MIAMI DEP CON  
126.85 290.325  
D-ATIS  
133.675  
CLNC DEL  
135.35  
CPDIC  
GND CON  
(8L/R, 12, 26L/R)  
121.8 348.6  
(9, 27, 30)  
127.5 348.6  
MIAMI TOWER  
118.3 256.9

**TOP ALTITUDE:  
5000**

RNAV-1 DME/DME/IRU or GPS.  
RADAR required.

BNGOS  
See following page  
for transition routes.

**TAKEOFF MINIMUMS**  
Rwy 8L: Standard with minimum climb of 500'/NM to 520, then minimum climb of 215'/NM to 1400.  
Rwy 8R: Standard with minimum climb of 500'/NM to 520, then minimum climb of 235'/NM to 1400.  
Rwy 9: Standard with minimum climb of 500'/NM to 520, then minimum climb of 240'/NM to 1400.  
Rwy 12: Standard with minimum climb of 500'/NM to 520, then minimum climb of 230'/NM to 1400.  
Rwys 26L/R, 27, 30: Standard with minimum climb of 500' per NM to 520.

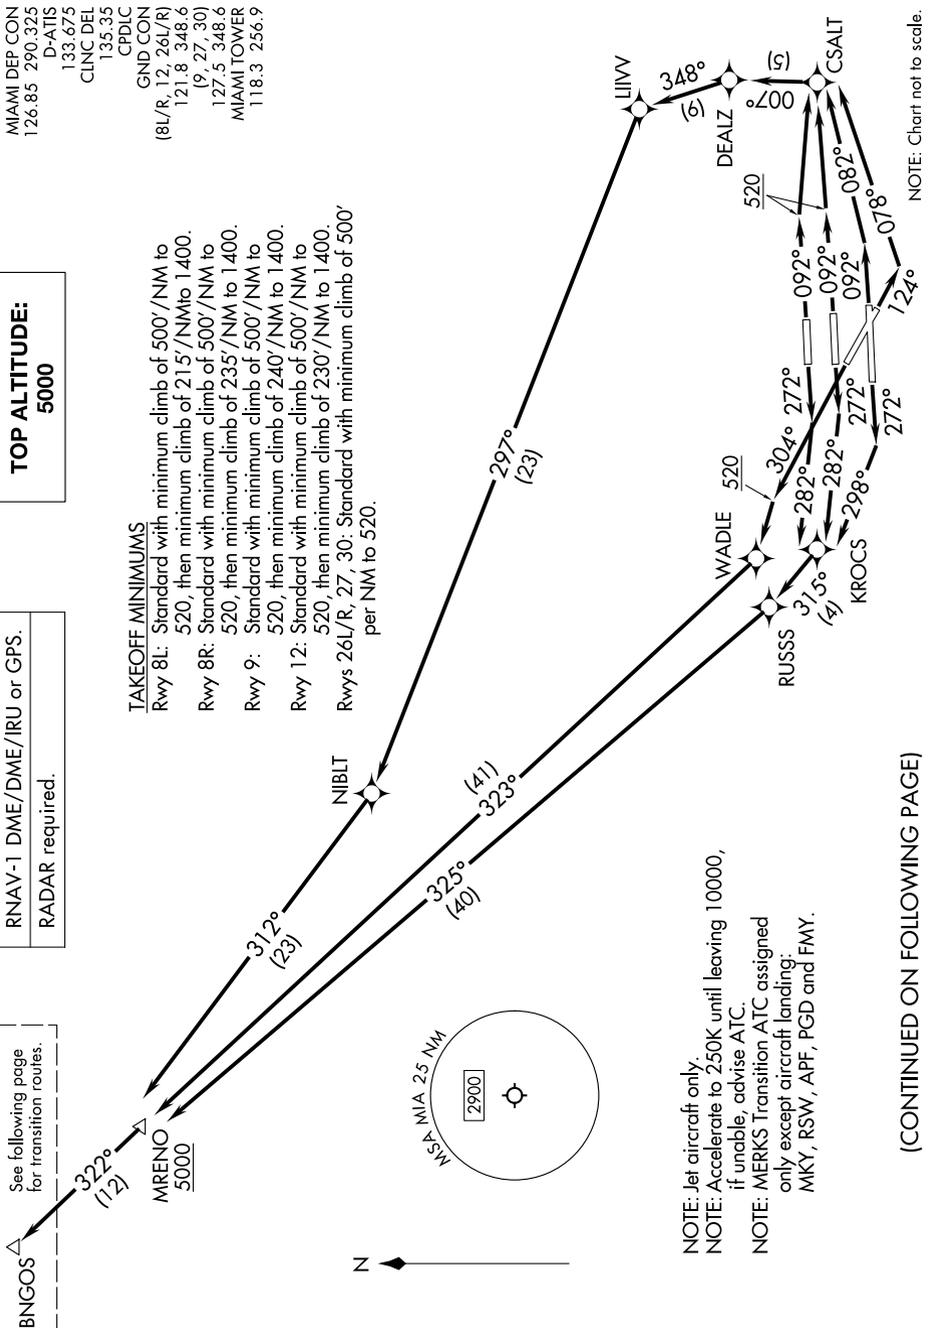

NOTE: Jet aircraft only.  
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.  
NOTE: MERKS Transition ATC assigned only except aircraft landing: MKY, RSW, APF, PGD and FMY.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.