


TOP ALTITUDE:
5000

RNAV 1 - DME/DME/IRU or GPS.

RADAR required for non-GPS equipped aircraft.

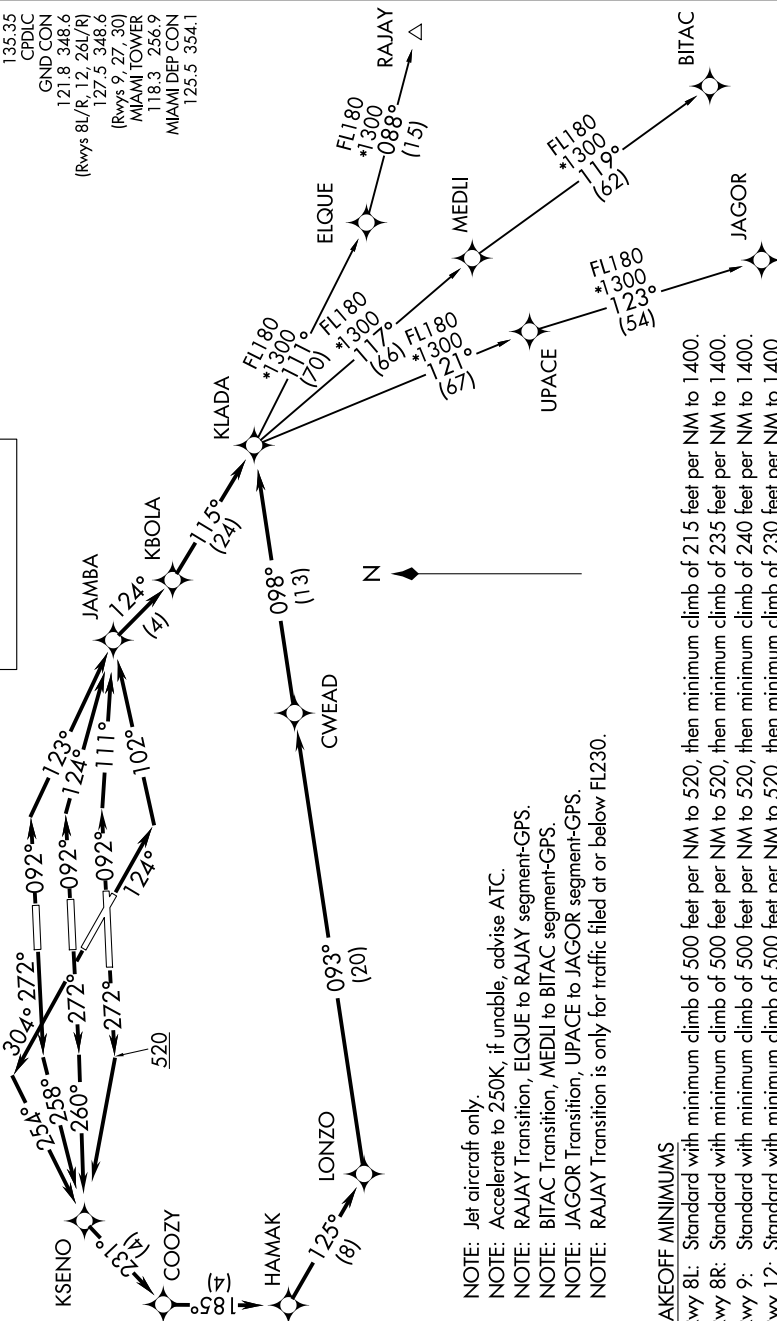

NOTE: Jet aircraft only.

NOTE: Accelerate to 250K, if unable, advise ATC.

NOTE: RAJAY Transition, ELQUE to RAJAY segment-GPS.

NOTE: BITAC Transition, MEDLI to BITAC segment-GPS.

NOTE: JAGOR Transition, UPACE to JAGOR segment-GPS.

NOTE: RAJAY Transition is only for traffic filed at or below FL230.

TAKEOFF MINIMUMS

Rwy 8L: Standard with minimum climb of 500 feet per NM to 520, then minimum climb of 215 feet per NM to 1400.

Rwy 8R: Standard with minimum climb of 500 feet per NM to 520, then minimum climb of 235 feet per NM to 1400.

Standard with minimum climb of 300 feet per NM to 320, then minimum climb of 200 feet per NM to 1400.

Standard with minimum climb of 500 feet per NM to 520, then minimum climb of 240 feet per NM to 1400.

Divy 12: Standard with minimum climb of 500 feet per NM to 520, then minimum climb of 230 feet per NM to 1400.

Downs 261/P 27 30: Standard with minimum climb of 500 feet on NM to 520

KLADA TWO DEPARTURE (RNAV)

(KLADA2.KLADA) 19MAY22