

MIAMI, FLORIDA



AL-257 (FAA)


25275

WAAS CH 86903 W26A	APP CRS 272°	Rwy Ldg 8600 TDZE 9 Apt Elev 9
--	------------------------	---

RNAV (GPS) RWY 26R
MIAMI INTL (MIA)

RNP APCH - GPS.		MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.		
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 9°C or above 54°C.				
D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30)	348.6

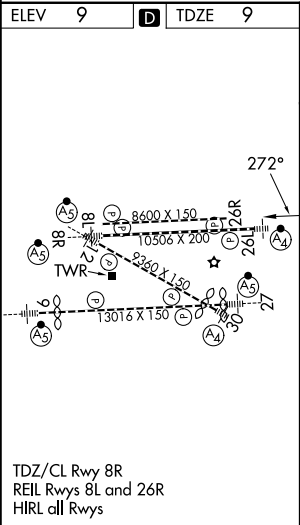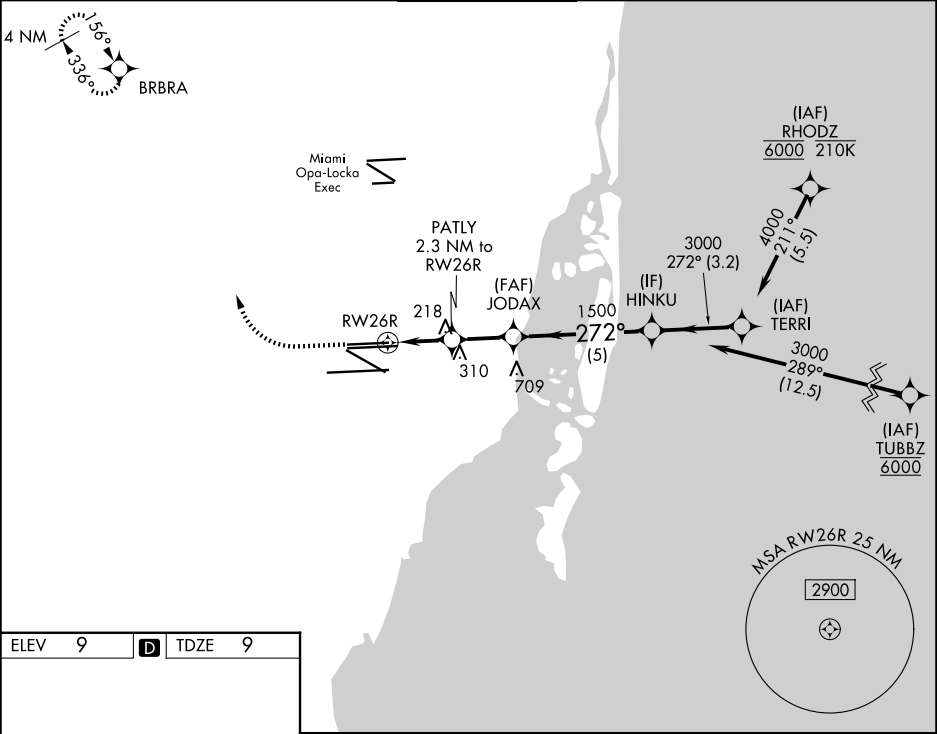

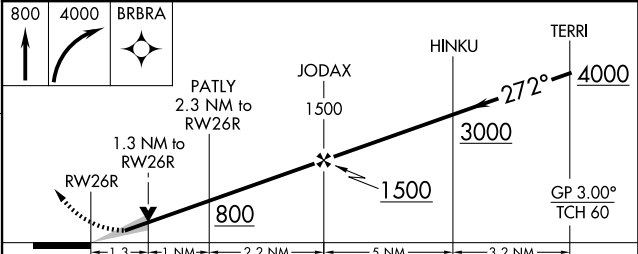800	4000	BRBRA					
							
							
CATEGORY	A		B		C		D
LPV DA			265- $\frac{3}{4}$		256 (300- $\frac{3}{4}$)		
LNAV/VNAV DA			432-1 $\frac{1}{4}$		423 (500-1 $\frac{1}{4}$)		
LNAV MDA	480-1		471 (500-1)		480-1 $\frac{3}{8}$		471 (500-1 $\frac{3}{8}$)

MIAMI, FLORIDA
Amdt 5 14JUL22

25°48'N-80°17'W

MIAMI INTL (MIA)
RNAV (GPS) RWY 26R

SE-3, 22 JAN 2026 to 19 FEB 2026

SE-3, 22 JAN 2026 to 19 FEB 2026