

WAAS CH 57935 W13A	APP CRS 132°	Rwy Ldg TDZE Apt Elev	4797 811 827
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

ROSECRANS MEML (STJ)


ASR/PAR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Straight-In minimums NA at night. Baro-VNAV and VDP NA when using Kansas City Intl altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Kansas City Intl altimeter setting and increase all DA 97 feet, and LPV visibility ¾ mile all Cats, LNAV/VNAV visibility ¼ mile all Cats; increase all MDA 100 feet and Circling Cat C ½ mile, Cat D ¼ mile.

MISSED APPROACH:

Climb to 3100 direct ZOAXD and hold.

ATIS 125.05	ST. JOSEPH APP CON ★ 120.35 360.8	ST. JOSEPH TOWER ★ 126.9 (CTAF) 239.0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

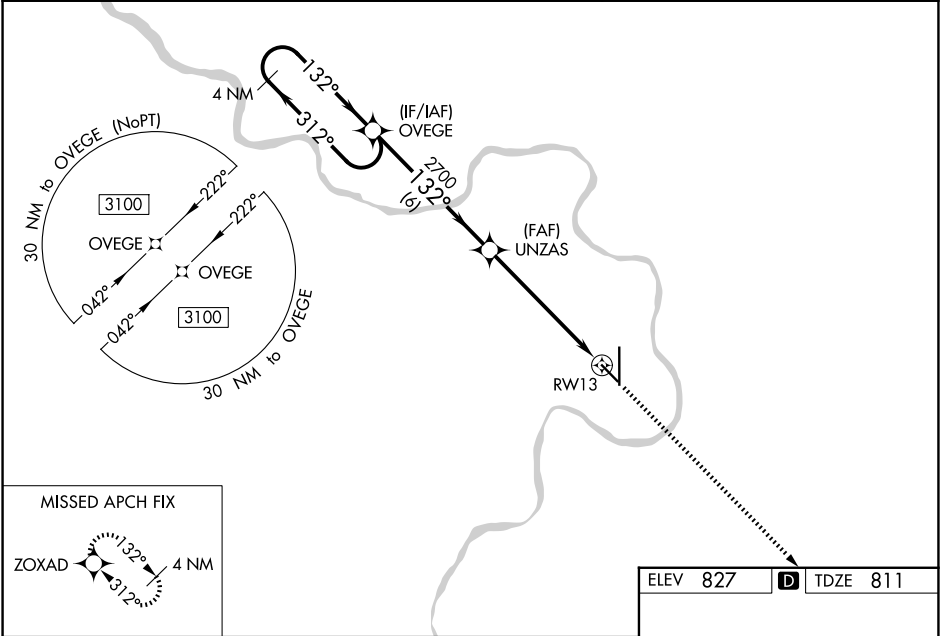

4 NM Holding Pattern 3100 ← 312° / 132° → GP 3.00° TCH 50					OVEGE UNZAS 3100 ZOAXD * 2.3 NM to RW13 * LNAV only.	
6 NM 3.5 NM 2.3 NM					132° 8063 X 150 4787 X 75 35 TWR	
CATEGORY	A	B	C	D		
LPV DA	1377-1⅞ 566 (600-1⅞)					
LNAV/VNAV DA	1416-2¼ 605 (600-2¼)					
LNAV MDA	1580-1 769 (800-1)	1580-1¼ 769 (800-1¼)	1580-2½ 769 (800-2½)			
CIRCLING	1580-1 753 (800-1)	1580-1¼ 753 (800-1¼)	1620-2½ 793 (800-2½)	1640-2¾ 813 (900-2¾)		
					MIRL Rwy 13-31 ①	
					HIRL Rwy 17-35 ①	
					REIL Rwy 17 and 35 ①	