

WAAS CH 77819 W35A	APP CRS 356°	Rwy Ldg TDZE 815 Apt Elev 827
--	------------------------	---



RNAV (GPS) RWY 35

ROSECRANS MEML (STJ)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Kansas City Intl altimeter setting. When local altimeter setting not received, use Kansas City Intl altimeter setting and increase all DA 97 feet and increase LPV all Cats visibility to RVR 5000, and LNAV/VNAV all Cats visibility to 1¼ mile; increase all MDA 100 feet, and increase LNAV Cat C/D/E visibility ¼ mile, and Circling Cat C ½ mile, Cat D ½ mile.

MISSED APPROACH:
Climb to 3000 direct
TOCDU and hold.

ATIS 125.05	ST. JOSEPH APP CON ★ 120.35 360.8	ST. JOSEPH TOWER ★ 126.9(CTAF) 0 239.0	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

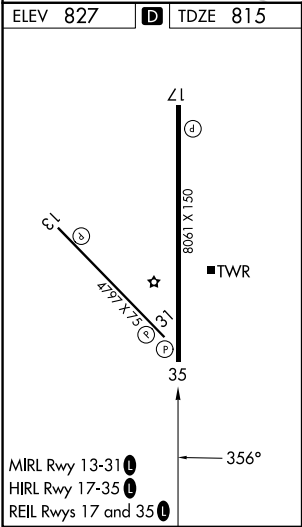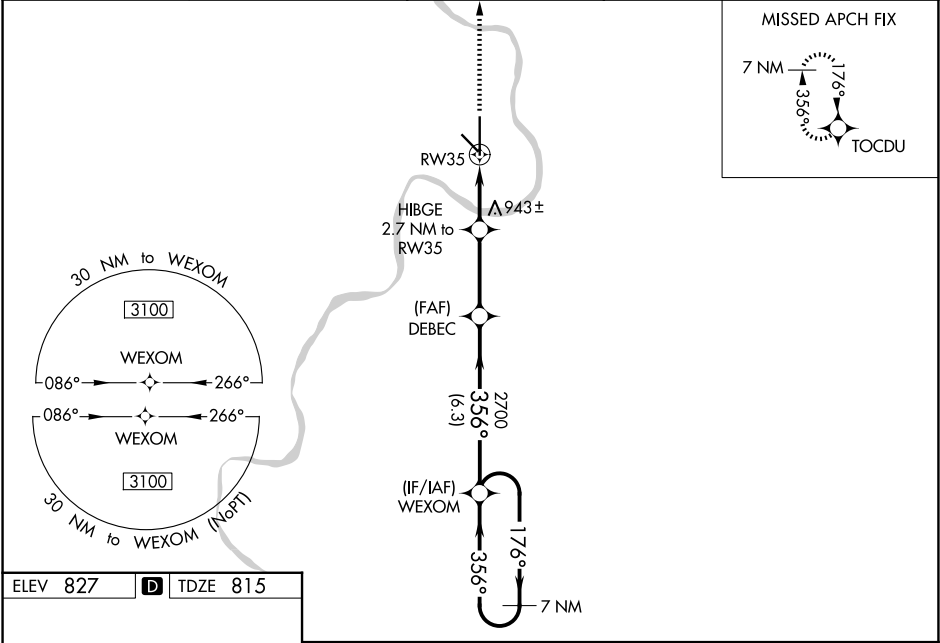

3000	TOCDU	VGSI and RNAV glidepath not coincident (VGSI Angle 2.80/TCH 64).				WEXOM	7 NM
*LNAV only.		HIBGE 2.7 NM to RW35	DEBEC	2700	356°	176°	3100
RW35		*1.1 NM to RW35	1720*	2700	356°	176°	3100
		1.1 NM	1.6 NM	3.1 NM	6.3 NM	GP 3.00° TCH 50	
CATEGORY	A	B	C	D	E		
LPV DA	1015/40 200 (200-¾)						
LNAV/VNAV DA	1096/45 281 (300-⅞)						
LNAV MDA	1200/55	385 (400-1)	1200/60 385 (400-1¼)				
CIRCLING	1400-1 573 (600-1)	1420-1 593 (600-1)	1620-2¼ 793 (800-2¼)	1640-2¾ 813 (900-2¾)	1760-3 933 (1000-3)		

NC-3, 22 JAN 2026 to 19 FEB 2026

NC-3, 22 JAN 2026 to 19 FEB 2026