

D-ATIS	124.75	125.625
CLINC DEL	127.3	379.975
CPDLC		
CGND CON	121.9	348.6 (Rw)
SALT LAKE CITY TOWER	123.775	348.6 (Rw)
SALT LAKE CITY TOWER	119.05	257.8 (Rw)
SALT LAKE CITY DEPARTURE	118.3	257.8 (Rw)
SALT LAKE CITY DEPARTURE	132.65	336.4 (Rw)
SALT LAKE CITY DEPARTURE	135.5	316.15

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE:
FL230


TAKEOFF MINIMUMS

Rwys 14, 32: NA-ATC.

Rwyw 16L: Standard with minimum climb of 470' per NM to 9900.
 Rwyw 16R: Standard with minimum climb of 500' per NM to 9700.
 Rwyw 17: Standard with minimum climb of 425' per NM to 9400.
 Rwyw 34L: Standard with minimum climb of 250' per NM to 8500.
 Rwyw 34R: Standard with minimum climb of 310' per NM to 11500.
 Rwyw 35: Standard with minimum climb of 305' per NM to 11500.

NOTE: Turbojet aircraft only.

NOTE: Aircraft landing Denver Intl Airport, file the PERTY Transition.

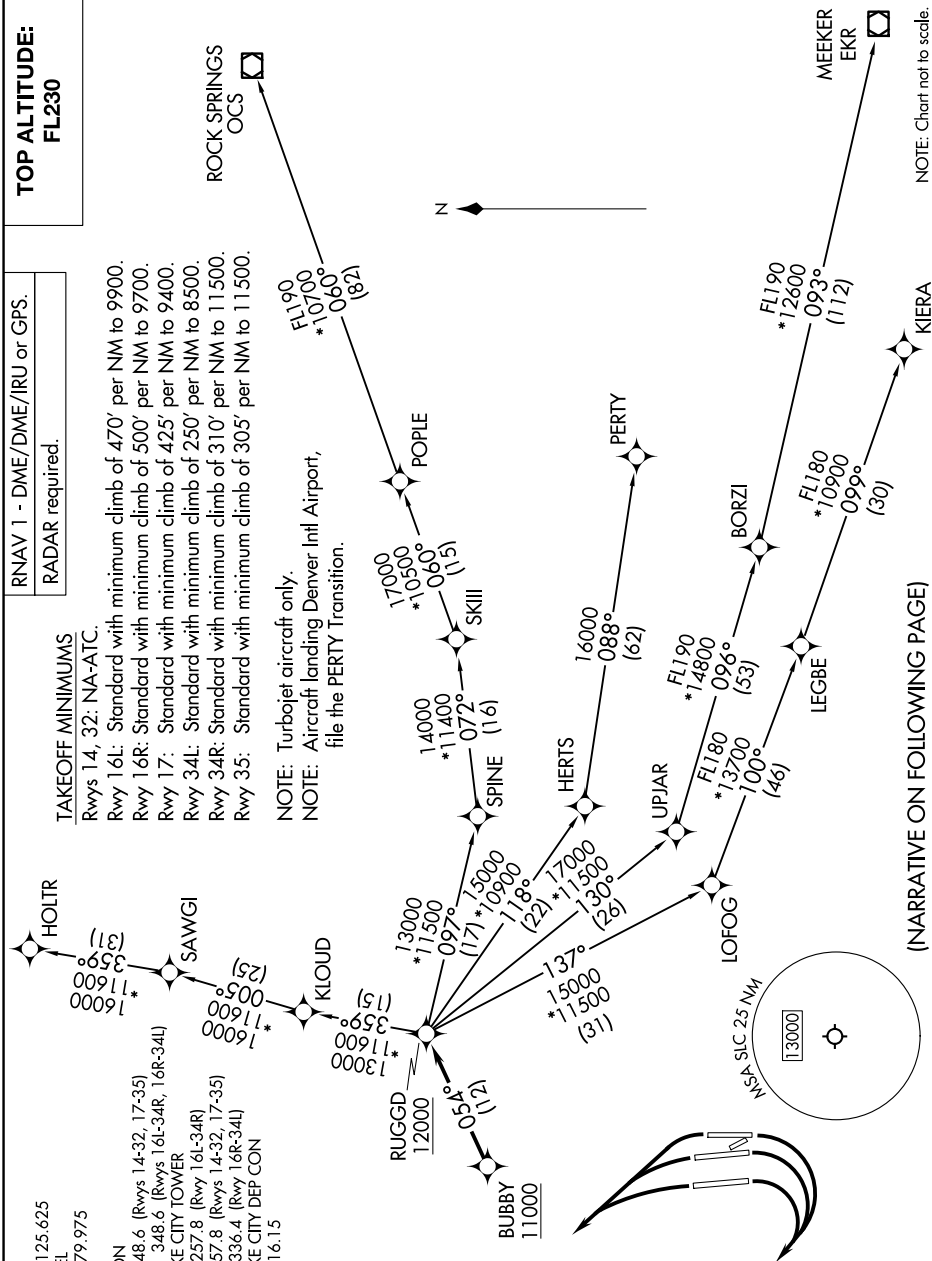

(NARRATIVE ON FOLLOWING PAGE)

RUGGD THREE DEPARTURE (RNAV)
(RUGGD3.RUGGD) 20APR23

SALT LAKE CITY, UTAH
SALT LAKE CITY INTL (SLC)