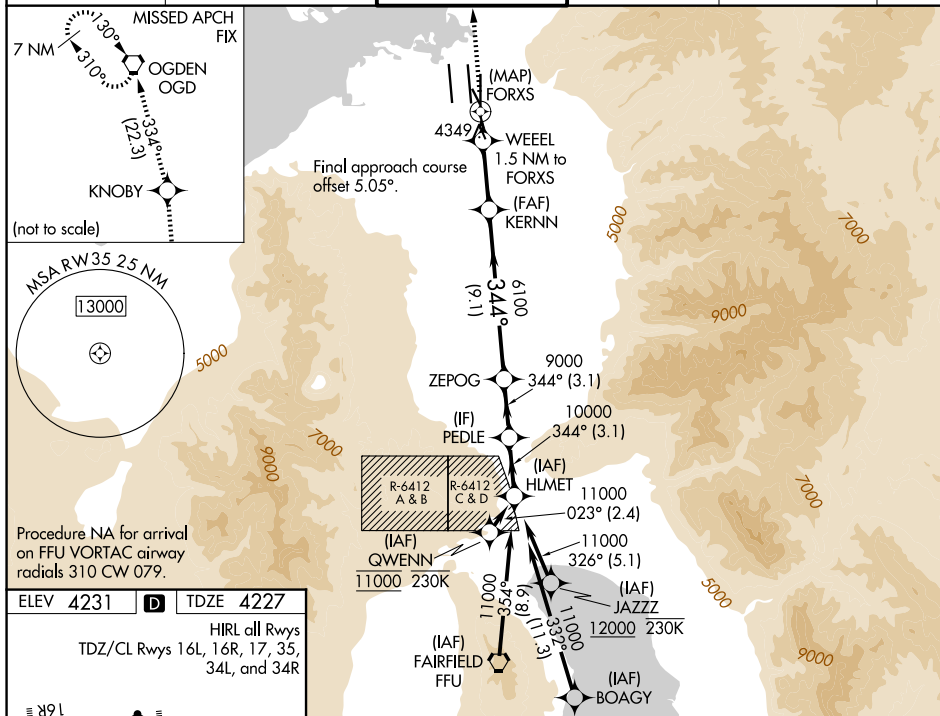


WAAS CH 42843 W35A	APP CRS 344°	Rwy Ldg 9272 TDZE 4227 Apt Elev 4231
--	------------------------	---

RNAV (GPS) Y RWY 35
SALT LAKE CITY INTL (SLC)

RNP APCH - GPS.					MISSED APPROACH: Climb to 9000 direct KNOBY and on track 334° to OGD VORTAC and hold.	
T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 49°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV all Cats visibility to RVR 4500, and increase LNAV Cats C/D/E visibility to RVR 5500.						
D-ATIS 124.75 125.625		SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 118.3 257.8	GND CON 121.9 348.6	CLNC DEL 127.3 379.975	CPDLC

[illegible]