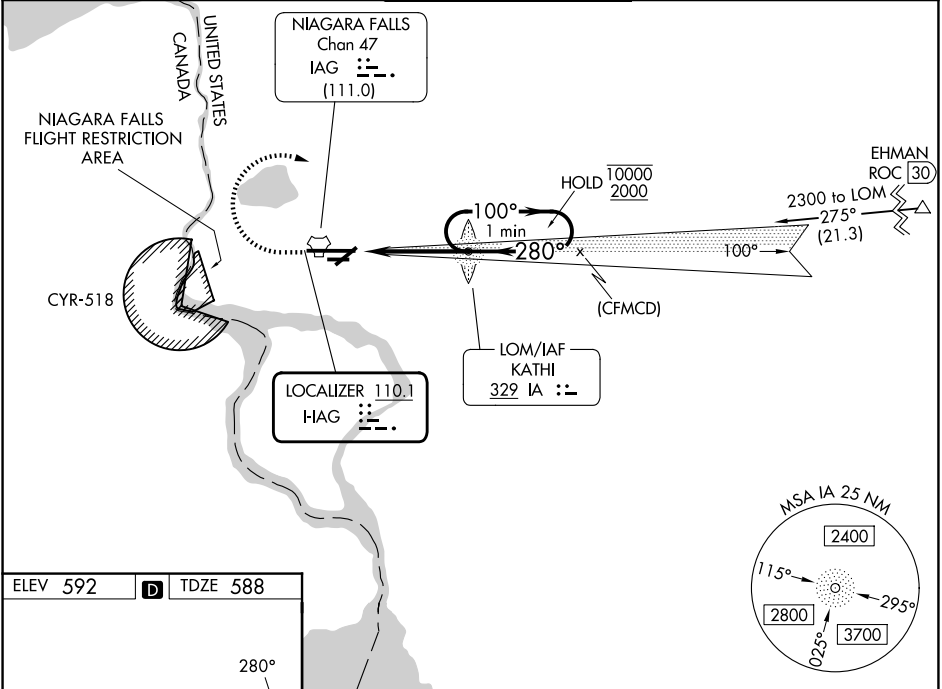



LOC I- IA 110.1	APP CRS 280°	Rwy Ldg TDZE Apt Elev	9129 588 592
----------------------------------	------------------------	-----------------------------	---


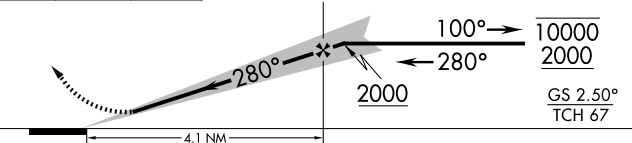
ILS Y or LOC Y RWY 28
NIAGARA FALLS INTL (IAG)

ADF required.		MALSR 	MISSED APPROACH: Climb to 1500 then climbing right turn to 3200 direct KATHI LOM and hold, continue climb-in-hold to 3200.
 Rwy 28 helicopter visibility reduction below RVR 4000 NA. Circling Rwy 6 NA at night. Circling NA for Cat E southeast of Rwy 6-24. Inop table does not apply to S-ILS 28 all Cats. For inop ALS, increase S-LOC 28 visibility Cats A/B RVR 5500, Cats C/D/E 1 3/4 SM.			

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
----------------------------	---------------------------------------	--	-------------------------------	-------------------------



ELEV 592	D	TDZE 588
		
REIL Rws 6 and 24 		
TDZL/RCLS Rwy 28		
HIRL Rwy 10-28 		
MIRL Rwy 6-24 		
FAF to MAP 4.1 NM		
Knots	60	90 120 150 180
Min:Sec	4:06	2:44 2:03 1:38 1:22

		IA LOM		One Minute Holding Pattern	
		1747		GS 2.50° TCH 67	
4.1 NM		CATEGORY		A B C D E	
S-ILS 28		838/40		250 (300-3/4)	
S-LOC 28		1080/40 492 (500-3/4)		1080/50 492 (500-1)	
CIRCLING		1100-1 508 (600-1)		1280-2 688 (700-2) 1280-2 1/4 688 (700-2 1/4) 1280-2 1/2 688 (700-2 1/2)	

ILS Y or LOC Y RWY 28