

LOC I-JDP

108.7

APP CRS

276°

Rwy Ldg

12000

TDZE

875

Apt Elev

896

ILS or LOC RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. From FIBSU, BREWZ, ZALD or YEYUP.

RADAR required for procedure entry at KAYDE.



▼

For inop ALS, increase S-LOC 27 Cat C/D visibility to 1½ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALS

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct FLM VOR/DME and hold.

D-ATIS	CINCINNATI APP CON	CINCINNATI TOWER	GND CON
134.375	119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	121.7

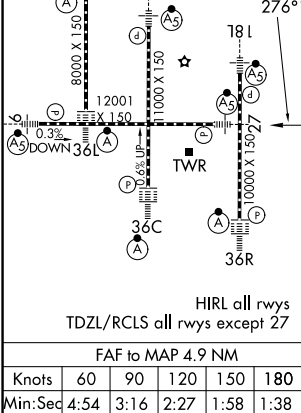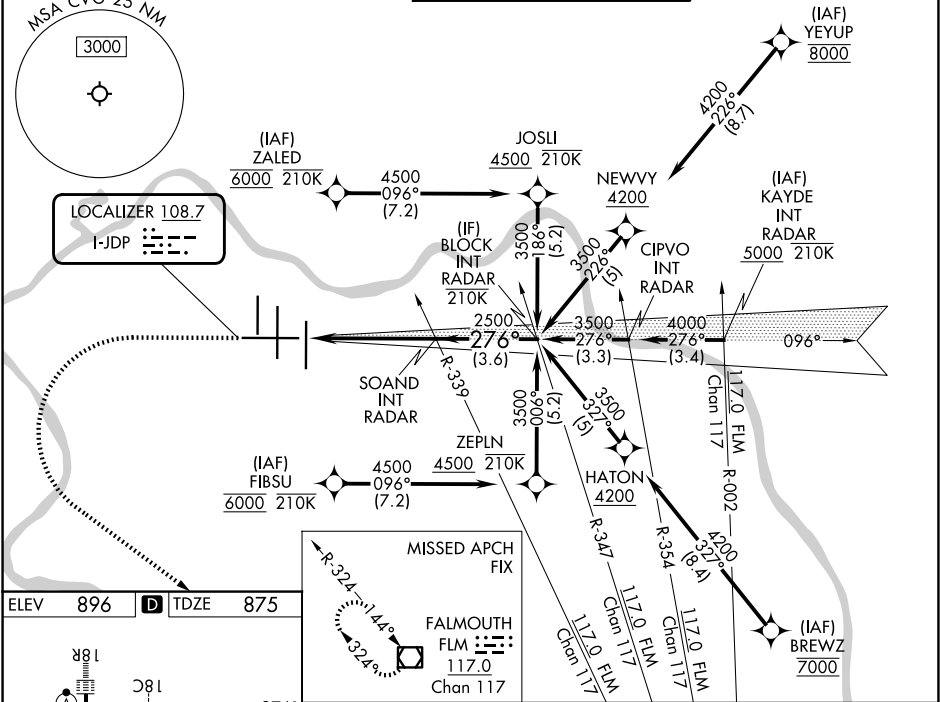

CATEGORY	A	B	C	D
S-ILS 27*	1075/24		200 (200-½)	
S-LOC 27	1340/24	465 (500-½)	1340/50	465 (500-1)
CIRCLING	1460-1	564 (600-1)	1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)