JBNCH SIX DEPARTURE (RNAV)

AL-655 (FAA)

COVINGTON, KENTUCKY

RNAV 1 - DME/DME/IRU or GPS.	TOP ALTITUDE:
RADAR required for non-GPS equipped aircraft.	(JETS) 5000/(PROPS) 4000

D-ATIS DEP 135.3
CINCINNATI TOWER
118.3 (RWYS 18C/36C, 9/27)
118.975 360.85 (RWY 18L/36R)
133.325 (RWY 18R/36L)
GND CON
121.7
CLNC DEL
127.175
CPDLC
CINCINNATI DEP CON
126.65 254.25 (001°-180°)
128.7 254.25 (181°-360°)

TAKEOFF MINIMUMS
Rwys 9, 18L/R, 27, 36L/C/R: Standard.
Rwy 18C: Standard with minimum climb of 500′/NM to 1400.

NOTE: Increase speed to 250K until reaching/leaving 10000′. If unable, advise ATC.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Transponder code will be issued via PDC or Cincinnati CLNC DEL.
NOTE: SNKPT Transition for ORD terminal area arrivals.

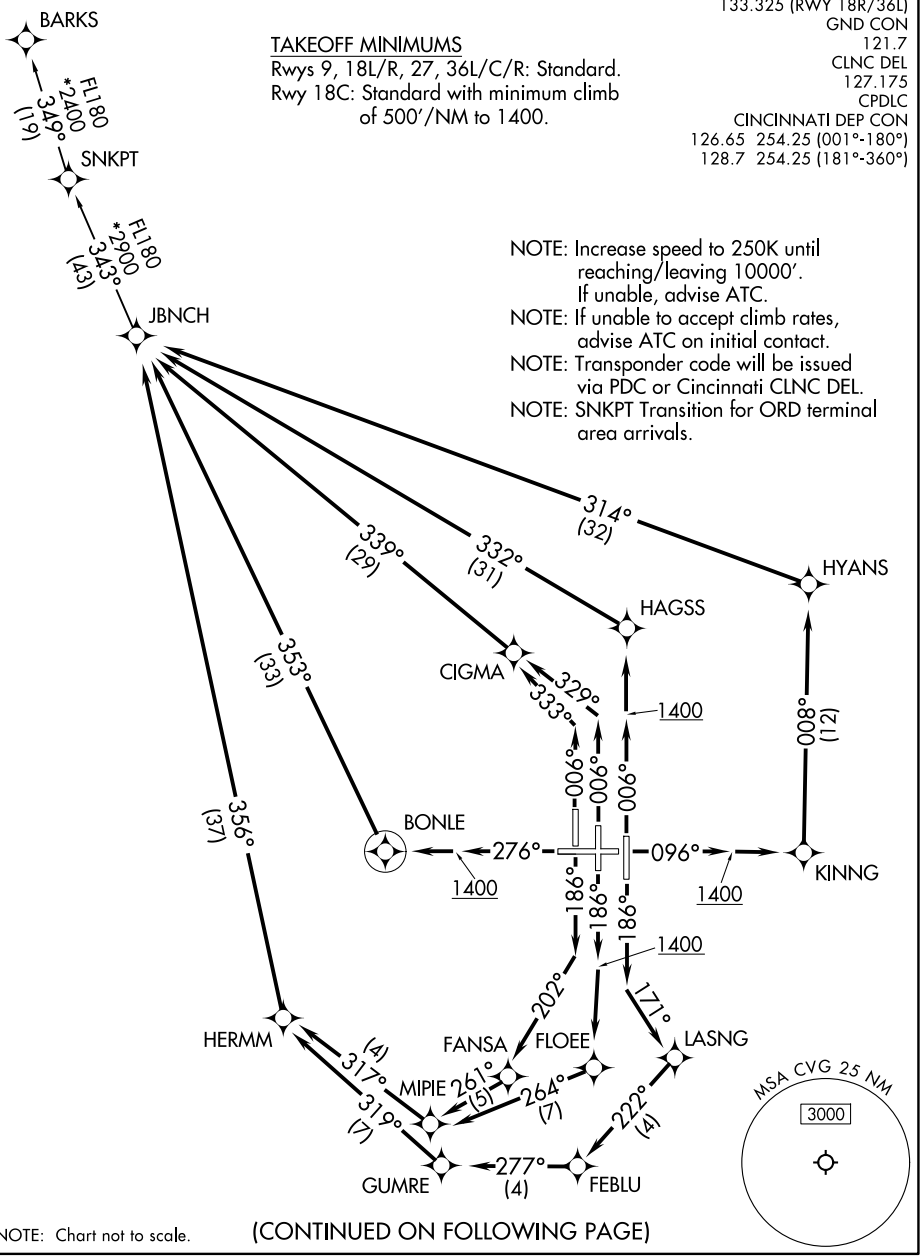

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SE-1, 22 JAN 2026 to 19 FEB 2026