

WAAS CH 53510 W04A	APP CRS 038°	Rwy Idg TDZE 763 Apt Elev 768
--	------------------------	---

RNAV (GPS) RWY 4
QUINCY RGNL-BALDWIN FLD (UIN)

RNP APCH - GPS.

▼


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV and VDP NA when using PPG altimeter setting. When local altimeter setting not received, use Pittsfield altimeter setting and increase LPV DA to 1033 feet; increase LNAV/VNAV DA to 1104 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¾ SM. For inop ALS when local altimeter setting not received, increase LPV all Cats visibility to ¾ SM; increase LNAV/VNAV all Cats visibility to 1 SM; increase LNAV Cat C and D visibility to 1 ¾ SM. For inop ALS increase LNAV/VNAV all Cats visibility to ¾ SM.

MALSR

MISSED APPROACH:
Climb to 2400 direct
FANUT and hold.

ASOS 121.425	KANSAS CITY CENTER 126.225 317.775	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

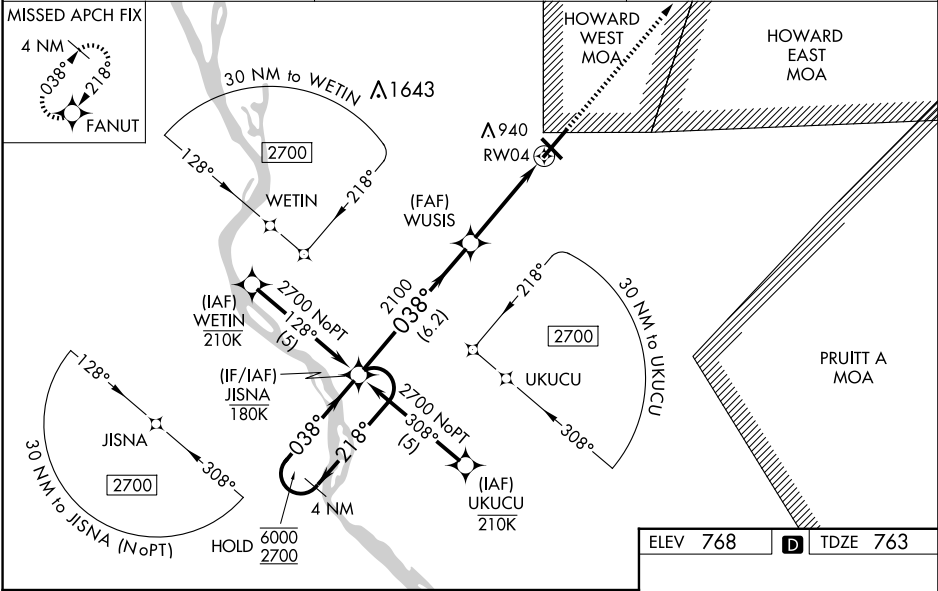

4 NM Holding Pattern

GP 3.00°
TCH 41

CATEGORY	A	B	C	D
LPV DA	963-1 200 (200-1 2)			
LNAV/VNAV DA	1034-1 271 (300-1 2)			
LNAV MDA	1160-1 2	397 (400-1 2)	1160-5 8	397 (400-5 8)
CIRCLING	1180-1 412 (500-1)	1220-1 452 (500-1)	1240-1 1 2 472 (500-1 2)	1320-2 552 (600-2)

ELEV 768 D TDZE 763

HRL Rwy 4-22 0

MRL Rwy 13-31 0

REIL Rwy 22 0

EC-3, 22 JAN 2026 to 19 FEB 2026

EC-3, 22 JAN 2026 to 19 FEB 2026