

WAAS
CH **97617**
W11A

APP CRS
111°

Rwy Ldg
TDZE **871**
Apt Elev **871**

RNAV (GPS) RWY 11

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using General Downing-Peoria Intl altimeter setting. When local altimeter setting not received, use General Downing-Peoria Intl setting: increase all DA 116 feet and all MDA 120 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats and LNAV Cat C/D visibility ¾ mile, and Circling Cats C/D visibility ¼ mile.

MISSED APPROACH:
Climb to 3100 direct
WAPIX and hold.

ATIS 119.575	SAINT LOUIS APP CON 128.725 256.9	BLOOMINGTON TOWER ★ 124.6 (CTAF) 0 269.575	GND CON 121.65	UNICOM 122.95
------------------------	---	--	--------------------------	-------------------------

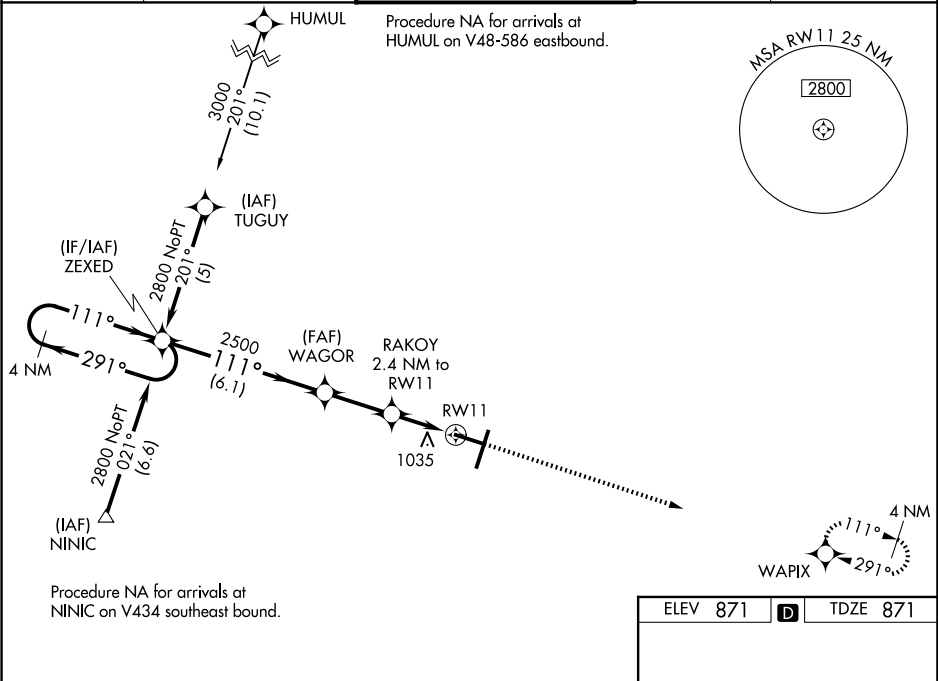

4 NM Holding Pattern ZEXED

2800 ← 291° 111°

GP 3.00° TCH 43

2500

WAGOR 2500

RAKOY 2.4 NM to RW11

*LNAV only

*1.2 NM to RW11

*1680

6.1 NM 2.5 NM 1.2 1.2

CATEGORY	A	B	C	D
LPV DA	1121- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)		
LNAV/VNAV DA	1341- $1\frac{5}{8}$	470 (500- $1\frac{5}{8}$)		
LNAV MDA	1280-1	409 (500-1)	1280- $1\frac{1}{4}$	409 (500- $1\frac{1}{4}$)
CIRCLING	1340-1	469 (500-1)	1620- $2\frac{1}{4}$ 749 (800- $2\frac{1}{4}$)	1620- $2\frac{1}{2}$ 749 (800- $2\frac{1}{2}$)

111°

☆

6525 X 150

8000 X 150

29

TWR

2

TDZ/CL Rwy 20 0

HIRL Rwy 2-20 and 11-29 0