

LOC/DME I-ROF
111.15
Chan **48(Y)**

APP CRS
328°

Rwy Ldg
TDZE **705**
Apt Elev **712**


LOC RWY 33
AURORA MUNI (ARR)

For inop ALS, increase S-LOC 33 Cats C and D visibility to 1¼ SM and EPABE FIX minimums S-LOC 33 Cats C and D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on heading 146° and JOT VOR/DME R-347 to VAINS INT/JOT 13 DME and hold, continue climb-in-hold to 3000.

ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER★ 120.6 (CTAF) 0	GND CON 121.7
-----------------------	---------------------------------------	--	-------------------------

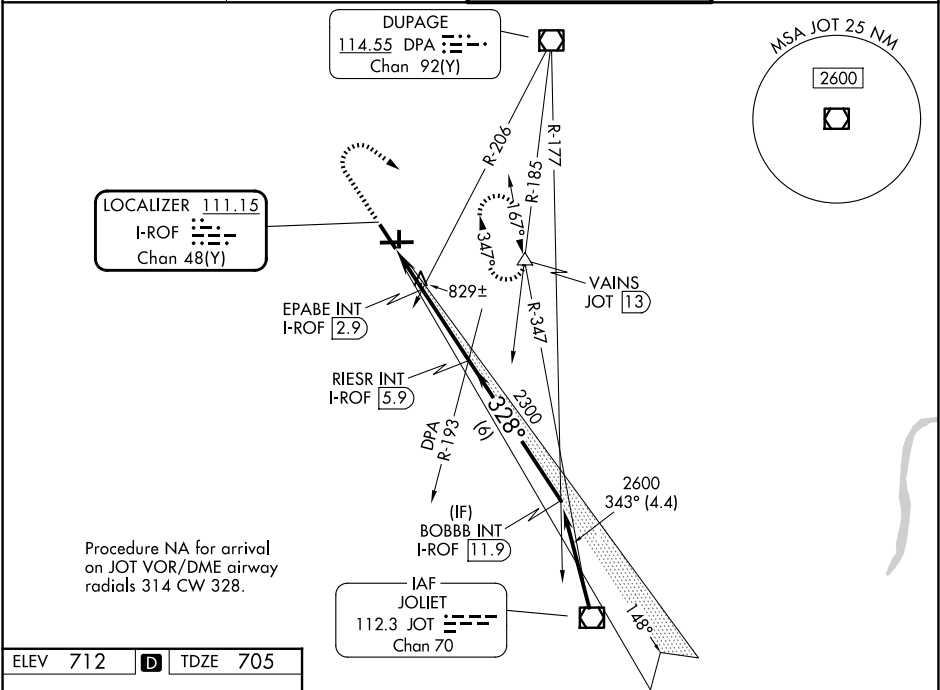

Procedure NA for arrival on JOT VOR/DME airway radials 314 CW 328.

ELEV 712 D TDZE 705

HIRL Rwys 15-33 and 9-27
MIRL Rwys 18-36
REIL Rwys 15, 18, 27, and 36

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

1400

↑

3000

hdg
146°

JOT
R-347

VAINS

△

RIESR INT
I-ROF 5.9

BOBBB INT
I-ROF 11.9

EPABE INT
I-ROF 2.9

I-ROF 1.1

I-ROF 2.1

328°

2600

2300

≤ 3.04°
TCH 48

1 NM

0.8 NM

3 NM

6 NM

CATEGORY	A		B	C	D
S-LOC 33	1320-½ 615 (700-½)		1320-1⅜ 615 (700-1⅜)		
CIRCLING	1320-1 608 (700-1)		1320-1¾ 608 (700-1¾)	1320-2 608 (700-2)	
EPABE FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)					
S-LOC 33	1080-½ 375 (400-½)		1080-⅝ 375 (400-⅝)		
CIRCLING	1200-1 488 (500-1)		1300-1½ 588 (600-1½)	1320-2 608 (700-2)	