

WAAS CH 61012 W18A	APP CRS 177°	Rwy Idg TDZE 1016 Apt Elev 1016	6203
--	------------------------	---	-------------


RNAV (GPS) RWY 18
ADA RGNL (ADH)

▼ Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Seminole altimeter setting. Circling Rwy 31 NA at night. Rwy 18 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV Cats A and B visibility ½ SM. For inop ALS when using Seminole altimeter setting; increase LPV all Cats visibility to 1 SM and LNAV/VNAV all Cats to ½ SM. When local altimeter setting not received, use Seminole altimeter setting; increase LPV DA to 1332 feet, LNAV/VNAV DA to 1386 and all MDA 80 feet. Increase LPV all Cats visibility ½ SM, increase LNAV/VNAV all Cats and LNAV Cat C and D visibility ¼ SM. Increase Circling Cats C/D visibility ½ SM.


ODALS

MISSED APPROACH:
Climb to 3000 direct
TANPY and hold.

AWOS-3PT 118.725	FORT WORTH CENTER 132.2 338.35	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

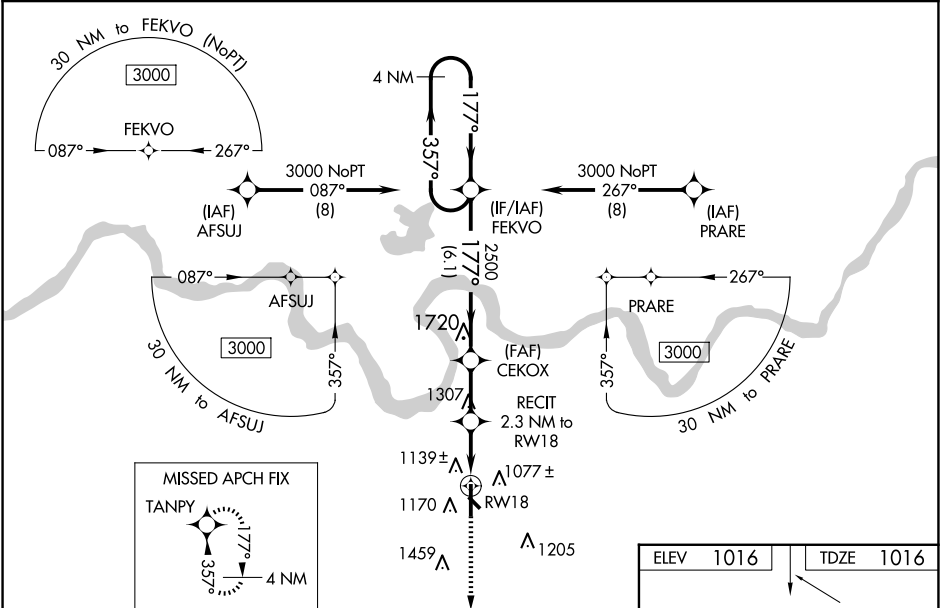

4 NM Holding Pattern FEKVO		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).		3000 TANPY
3000 ← 357° 177° →		CEKOX 2500	RECIT 2.3 NM to RW18	*LNAV only.
GP 3.00° TCH 55		2500	0.9 NM to RW18	
		6.1 NM	2.2 NM	1.4 NM 0.9 NM
CATEGORY	A	B	C	D
LPV DA	1266-¾		250 (300-¾)	
LNAV/VNAV DA	1320-7/8		304 (400-7/8)	
LNAV MDA	1400-¾		384 (400-¾)	
CIRCLING	1520-1		1820-2¼	
	504 (600-1)		804 (900-2¼)	

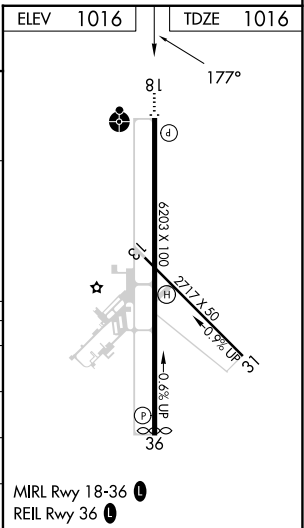

SC-1, 22 JAN 2026 to 19 FEB 2026

SC-1, 22 JAN 2026 to 19 FEB 2026