

LOC I-GRR 109.7	APP CRS 267°	Rwy Ldg 10001 TDZE 790 Apt Elev 794
---------------------------	------------------------	--


ILS or LOC RWY 26L
GERALD R FORD INTL (GRR)

⚠ For inop ALS increase S-LOC 26L Cat C/D visibility to 1½ SM.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct VIO VOR/DME and hold, continue climb in hold to 3000.

ATIS 118.725	GREAT LAKES APP CON★ 128.4 257.6	GRAND RAPIDS TOWER★ 135.65 (CTAF) 0 339.8	GND CON 121.8	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

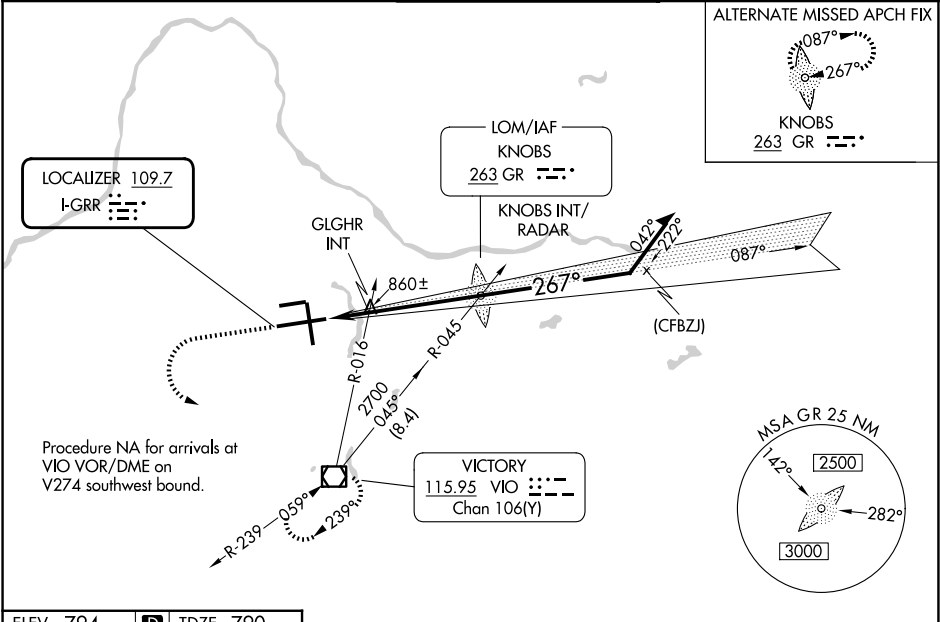

ELEV 794 **D** TDZE 790

MIRL Rwy 8L-26R **1**
REIL Rwys 8L, 17 and 26R **1**
HIRL Rwys 8R-26L and 17-35 **1**

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

1300	3000	VIO				
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).						
CATEGORY		A	B	C	D	
S-ILS 26L *		990/24		200 (200-½)		
S-LOC 26L		1360/24	570 (600-½)	1360-1¼	570 (600-1¼)	
CIRCLING		1360-1	566 (600-1)	1360-1½ 566 (600-1½)	1380-2 586 (600-2)	
GLGHR INT MINIMUMS (DUAL VOR RECEIVERS REQUIRED)						
S-LOC 26L		1120/24	330 (400-½)	1120/26	330 (400-½)	
CIRCLING		1260-1	466 (500-1)	1340-1½ 546 (600-1½)	1380-2 586 (600-2)	

EC-1, 22 JAN 2026 to 19 FEB 2026

EC-1, 22 JAN 2026 to 19 FEB 2026