

WAAS
CH **70313**
W35A

APP CRS
354°

Rwy Ldg
TDZE **845**
Apt Elev **845**

RNAV (GPS) RWY 35L


GRAND FORKS INTL (GFK)

RNP APCH.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 54°C. For Inop ALS, increase LNAV/VNAV Cat D visibility to RVR 5000 and LNAV Cat C/D visibility to RVR 5500.

MALSRR

MISSED APPROACH: Climb to 2600 direct FODIB and hold.

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4 (CTAF) 350.35	GND CON 124.575	UNICOM 122.95
----------------------	---	---	---------------------------	-------------------------

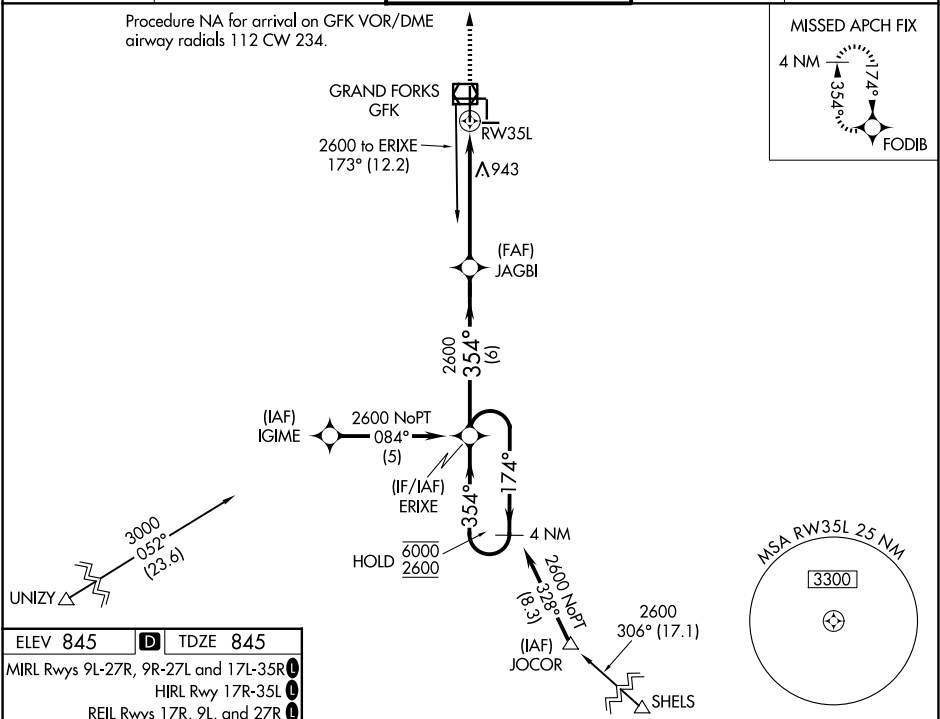

ELEV 845 **D** TDZE 845

MIRL Rwy 9L-27R, 9R-27L and 17L-35R

HIRL Rwy 17R-35L

REIL Rwy 17R, 9L, and 27R

