

VOR/DME GFK 114.3 Chan 90	APP CRS 344°	Rwy Ldg 7351 TDZE 845 Apt Elev 845
---	------------------------	---

VOR RWY 35L
GRAND FORKS INTL (GFK)


When local altimeter setting not received, use Crockston altimeter setting and increase all MDA 80 feet; increase Cat C/D visibility to 1¼ SM and Circling Cat C visibility ¼ SM. Increase ELVAV fix minimums Cat C/D visibility to RVR 4500 and Circling Cat C visibility ¼ SM. For inop ALS, increase S-35L Cat C/D visibility to 1¾ SM. ELVAV fix minimums: For inop ALS, increase S-35L Cat C/D visibility to RVR 5500.

MALSR




MISSED APPROACH: Climb to 1300 then climb to 3600 on GFK R-360 then right turn direct GFK VOR/DME and hold.

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4 (CTAF) 0 350.35	GND CON 124.575	UNICOM 122.95
----------------------	---	---	---------------------------	-------------------------

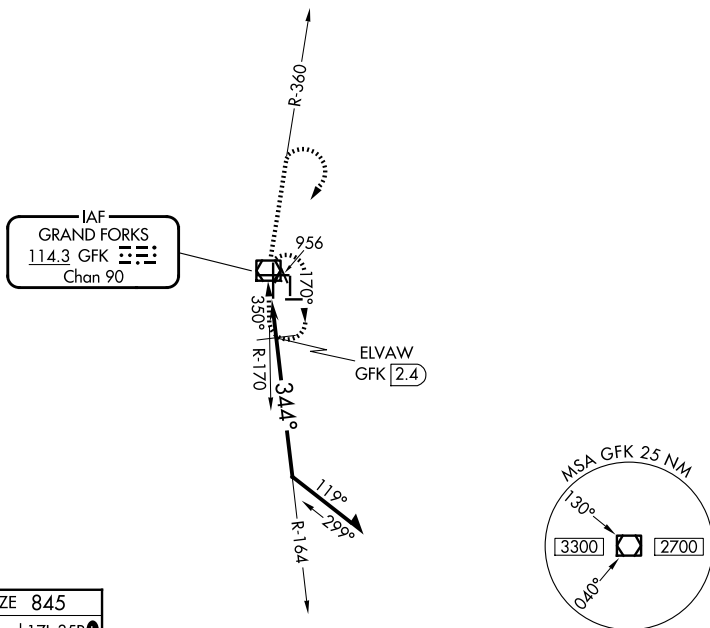

ELEV 845	D	TDZE 845
MIRL Rwy 9L-27R, 9R-27L and 17L-35R		
HIRL Rwy 17R-35L		
REIL Rwy 17R, 9L, and 27R		



1300 3600

GFK R-360

GFK

GFK VOR/DME

Remain within 10 NM

VGS and descent angles not coincident (VGS Angle 2.76/TCH 61).

*1440 when using Crookston altimeter setting.

164°

ELVAW GFK

3.01°

TCH 55

2.4

34°

1360*

1 NM 1.4 NM

CATEGORY	A	B	C	D
S-35L	1360/24	515 (600-½)	1360/55	515 (600-1)
CIRCLING	1360-1	515 (600-1)	1400-1½ 555 (600-1½)	1420-2 575 (600-2)

ELVAW FIX MINIMUMS

S-35L	1220/24	375 (400-½)	1220/40	375 (400-¾)
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1½ 555 (600-1½)	1420-2 575 (600-2)