| WAAS CH 77900 W13A | APP CRS 130° | Rwy Ldg 6701 TDZE 1301 Apt Elev 1304 |
|---|---|---|

# RNAV (GPS) RWY 13
## MITCHELL MUNI (MHE)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using HON altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use HON altimeter setting and increase LPV DA to 1664 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1776 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3200 direct JUTUB and hold.

| ASOS | MINNEAPOLIS CENTER | UNICOM |
|---|---|---|
| 124.175 | 126.25 339.8 | 122.8 (CTAF) L |

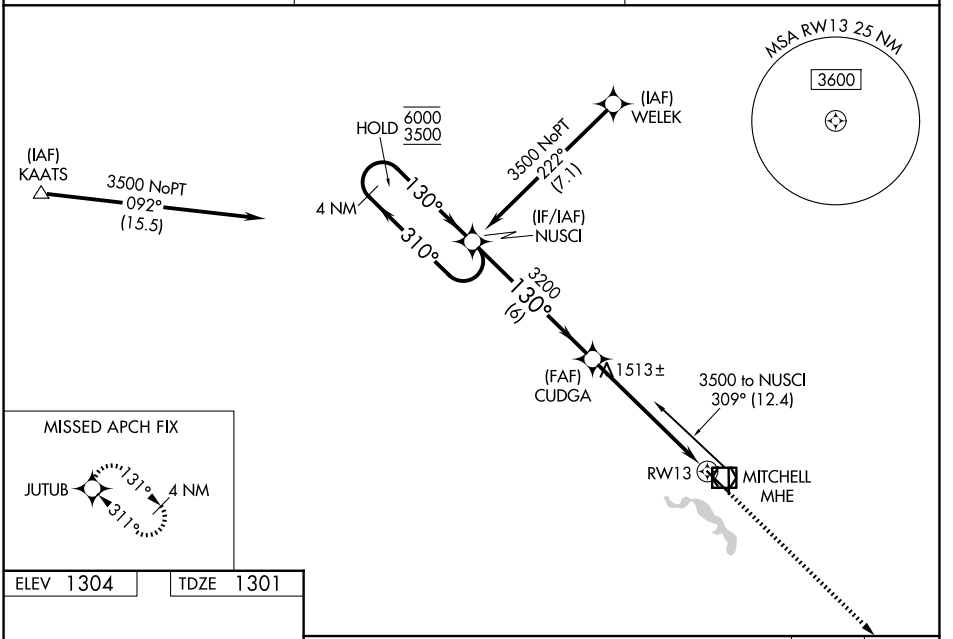


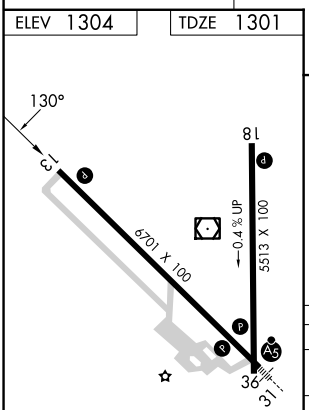


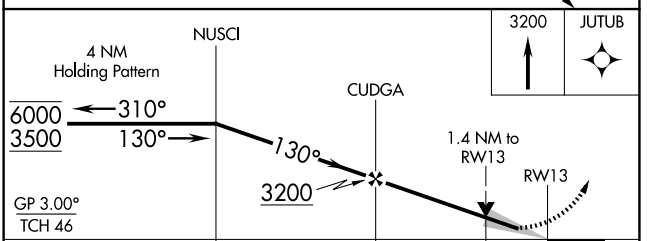


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1575-1 274 (300-1) | | | |
| LNAV/VNAV DA | 1687-1¼ 386 (400-1¼) | | | |
| LNAV MDA | 1780-1 479 (500-1) | | 1780-1⅜ 479 (500-1⅜) | |
| CIRCLING | 1780-1¼ 476 (500-1¼) | | 1820-1½ 516 (600-1½) | 1880-2 576 (600-2) |

HIRL Rwy 13-31 L
MIRL Rwy 18-36 L
REIL Rwys 13 and 18 L



NC-1, 22 JAN 2026 to 19 FEB 2026
NC-1, 22 JAN 2026 to 19 FEB 2026