

WAAS CH 82613 W27A	APP CRS 276°	Rwy Idg TDZE Apt Elev	5000 753 755
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 27

MOUNT PLEASANT MUNI (MOP)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F), DME/DME RNP-0.3 NA. When local altimeter setting not received, use Alma altimeter setting and increase all DA 42 feet and all MDA 60 feet, increase LPV, LNAV/VNAV all Cats, LNAV Cat D and Circling Cat C visibilities $\frac{1}{4}$ mile. Baro-VNAV and VDP NA when using Alma altimeter setting. Circling NA to Rwy 5 and 23.

MISSED APPROACH: Climb to 3000 direct COPTI and via 186° track direct INDAF and via 132° track to ELMME and hold.

AWOS-3 133.025	GREAT LAKES APP CON★ 126.45 235.625	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

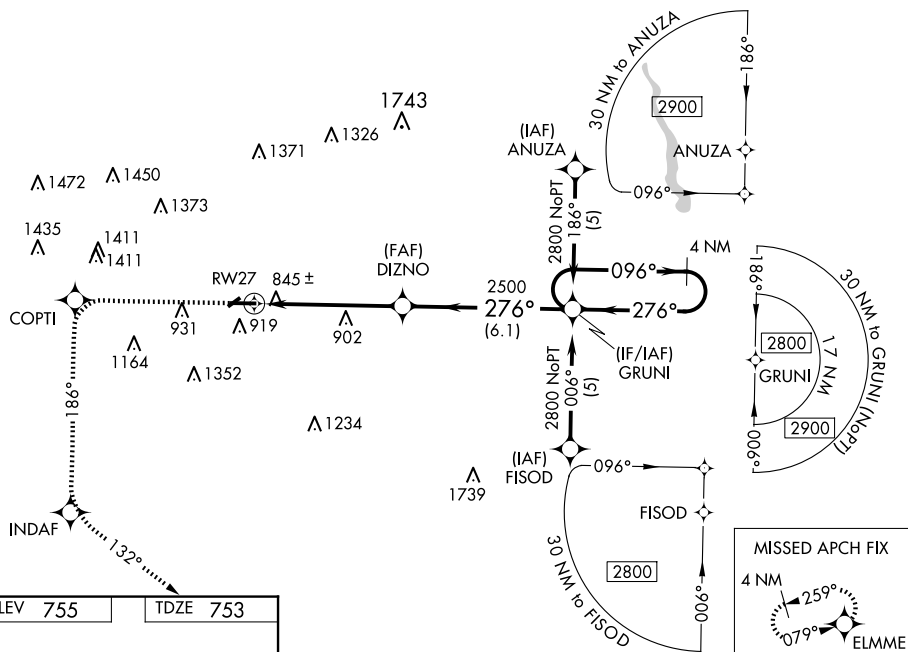

ELEV 755		TDZE 753
----------	--	----------



3000	COPTI	tr 186°	INDAF	tr 132°	ELMME	GRUNI	4 NM Holding Pattern
*LNAV only						DIZNO	
RW27		*1.2 NM to RW27		2500		276°	2800
1.2 NM		4.1 NM		6.1 NM			
						096°	276°
						GP 3.00°	TCH 37
CATEGORY	A	B		C		D	
LPV DA	1099-1¼ 346 (400-1¼)						
LNAV/VNAV DA	1201-1½ 448 (500-1½)						
LNAV MDA	1160-1 407 (500-1)				1160-1¼ 407 (500-1¼)		
CIRCLING	1240-1 485 (500-1)		1400-1¾ 645 (700-1¾)		1700-3 945 (1000-3)		

REIL Rwy 9 and 27 **L**
MIRL Rwy 9-27 **L**