

WAAS CH 97731 W28A	APP CRS 283°	Rwy Ldg 5006 TDZE 906 Apt Elev 906
--	------------------------	---


RNAV (GPS) RWY 28
L O SIMENSTAD MUNI (OEO)

RNP APCH - GPS.

▼ For uncompensated baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP and Baro-VNAV NA when using Anoka County/Blaine (Jones Fld) altimeter setting. Rwy 28 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Anoka County/Blaine (Jones Fld) altimeter setting: increase LPV DA to 1163 feet and visibility all Cats ⅛ SM; increase LNAV/VNAV DA to 1236 feet and visibility all Cats ¼ SM; increase all MDA 60 feet and visibility LNAV Cat C ⅜ SM and Circling Cat C ¼ SM. Circling NA to Rwy 4 and 22.

MISSED APPROACH:
Climb to 3000 direct
WESUS and hold.

AWOS-3 119.925	MINNEAPOLIS APP CON 121.2 335.65	GCO 121.725	CTAF 122.90
--------------------------	--	-----------------------	-----------------------

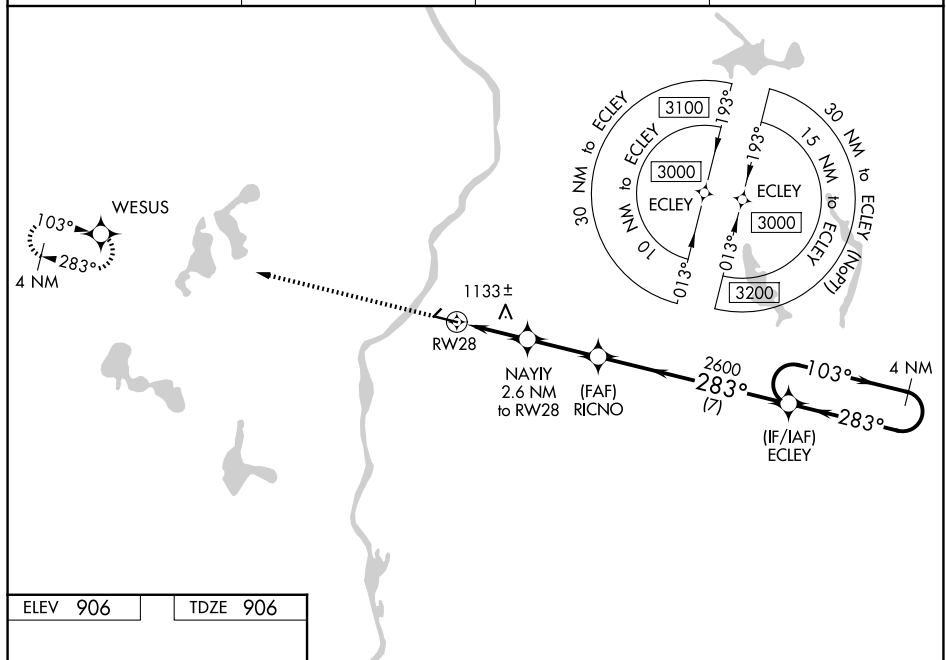

CATEGORY	A	B	C	D
LPV DA	1106- ³ / ₄	200 (200- ³ / ₄)		NA
LNAV/VNAV DA	1179- ⁷ / ₈	273 (300- ⁷ / ₈)		NA
LNAV MDA	1400-1	494 (500-1)	1400-1 ³ / ₈ 494 (500-1 ³ / ₈)	NA
CIRCLING	1400-1 494 (500-1)	1500-1 594 (600-1)	1520-1 ³ / ₄ 614 (700-1 ³ / ₄)	NA