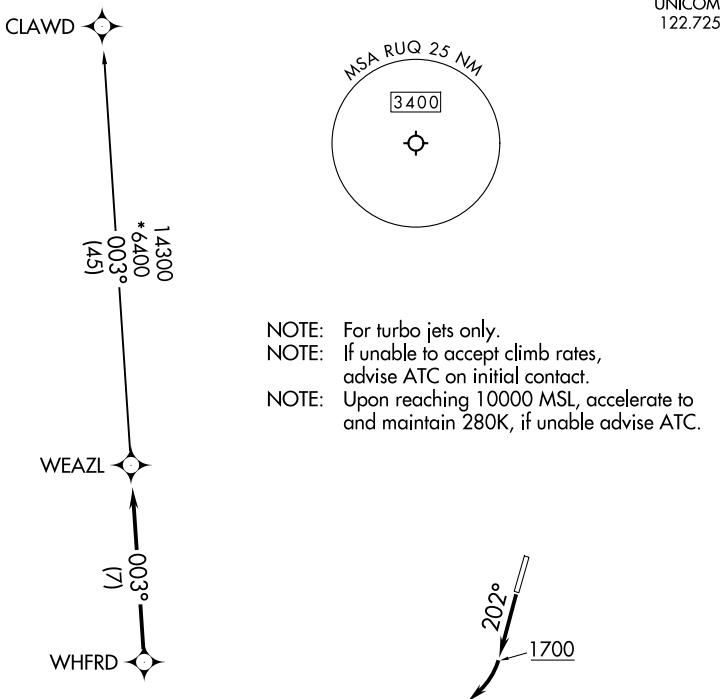


WEAZL FIVE DEPARTURE (RNAV)

MID-CAROLINA RGNL (RUQ)
SALISBURY, NORTH CAROLINA

RNAV 1 - DME/DME/IRU or GPS. RADAR required.	TOP ALTITUDE: 3000	CHARLOTTE DEP CON 128.325 307.8 AWOS-3 118.175 CLNC DEL 127.35 UNICOM 122.725
---	-------------------------------------	--

TAKEOFF MINIMUMS

Rwy 2: Standard.

Rwy 20: 400-2 1/4 or standard with minimum climb of 205' per NM to 1300, or alternatively, with standard takeoff minimums and a normal 200' per NM climb gradient, takeoff must occur no later than 1200' prior to DER.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climb on heading assigned by ATC, thenceTAKEOFF RUNWAY 20: Climb on heading 202° to 1700 before turning right, then on heading assigned by ATC, thence

. . . . on RADAR vectors to WHFRD, then on track 003° to WEAZL, then on CLAWD Transition. Maintain 3000, expect clearance to filed altitude within 10 minutes after departure.

CLAWD TRANSITION (WEAZL5.CLAWD)

WEAZL FIVE DEPARTURE (RNAV)
(WEAZL5.WEAZL) 21MAR24SALISBURY, NORTH CAROLINA
MID-CAROLINA RGNL (RUQ)