
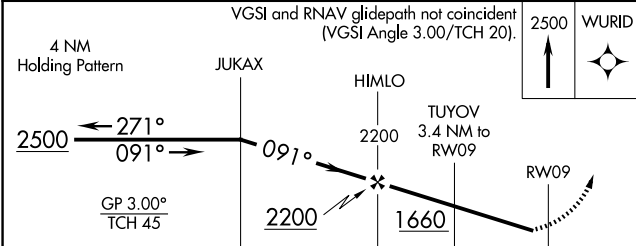


WAAS CH 53509 W09A	APP CRS 091°	Rwy Idg TDZE 530 Apt Elev 530
--	------------------------	---

RNAV (GPS) RWY 9
PEKIN MUNI (C15)

RNP APCH-GPS	Baro-VNAV NA. Rwy 9 helicopter visibility reduction below 3/4 SM NA. Use General Downing - Peoria Intl altimeter setting; when not received, use Lincoln altimeter setting; increase LPV DA to 887 feet; increase LNAV/VNAV DA to 1007 feet; increase all MDAs 40 feet and visibility Cat C and D 1/4 SM.	MISSED APPROACH: Climb to 2500 direct WURID and hold.
--------------	--	--

SAINT LOUIS APP CON 125.8 269.2	UNICOM 122.8 (CTAF)
---	-------------------------------

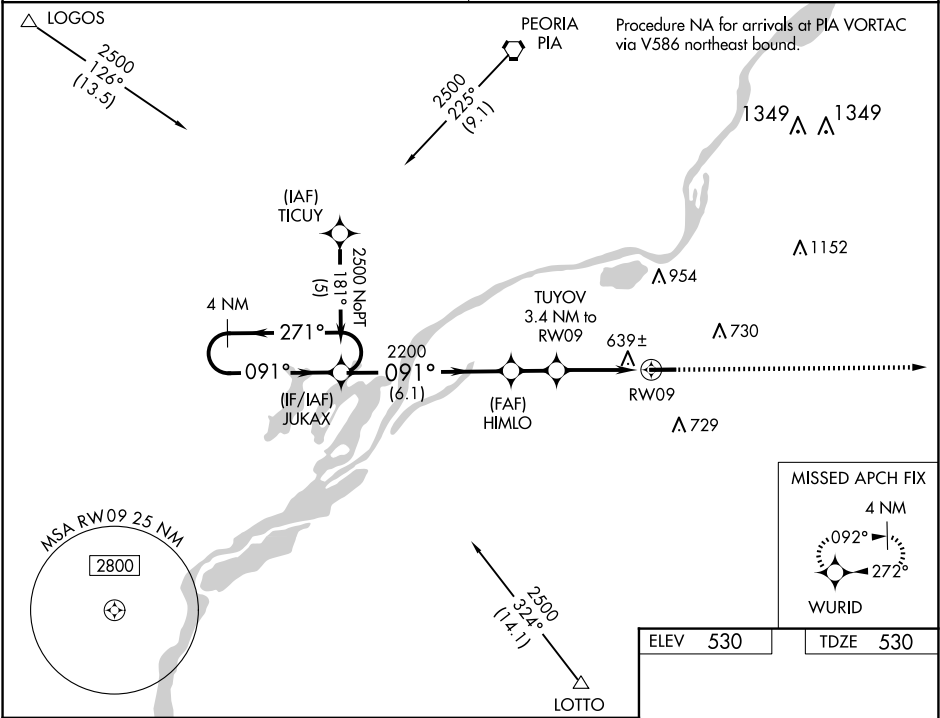

CATEGORY	A	B	C	D
LPV DA		862-1	332 (400-1)	
LNAV/VNAV DA		982-1 3/8	452 (500-1 3/8)	
LNAV MDA	940-1	410 (500-1)	940-1 1/8	410 (500-1 1/8)
CIRCLING	1060-1	530 (600-1)	1100-1 1/2 570 (600-1 1/2)	1360-2 3/4 830 (900-2 3/4)

ELEV 530 TDZE 530

WURID

REIL Rwy 9 and 27
MIRL Rwy 9-27