

APP CRS  
**052°**

Rwy Ldg  
**4699**

TDZE  
**434**

Apt Elev  
**434**

**RNAV (GPS) RWY 5**  
SARATOGA COUNTY (5B2)


RNP APCH.

Procedure NA at night. Rwy 5 helicopter visibility reduction below 1 SM NA.

When local altimeter setting not received, use Albany altimeter setting and increase all MDAs 80 feet and LNAV Cat C/D visibilities 1/8 SM.

MISSED APPROACH: Climb to 3000 direct TAYVO and hold.

|                          |                                         |                       |                                   |
|--------------------------|-----------------------------------------|-----------------------|-----------------------------------|
| AWOS-3<br><b>132.025</b> | ALBANY APP CON<br><b>118.05 263.075</b> | GCO<br><b>118.125</b> | UNICOM<br><b>123.075 (CTAF) 0</b> |
|--------------------------|-----------------------------------------|-----------------------|-----------------------------------|

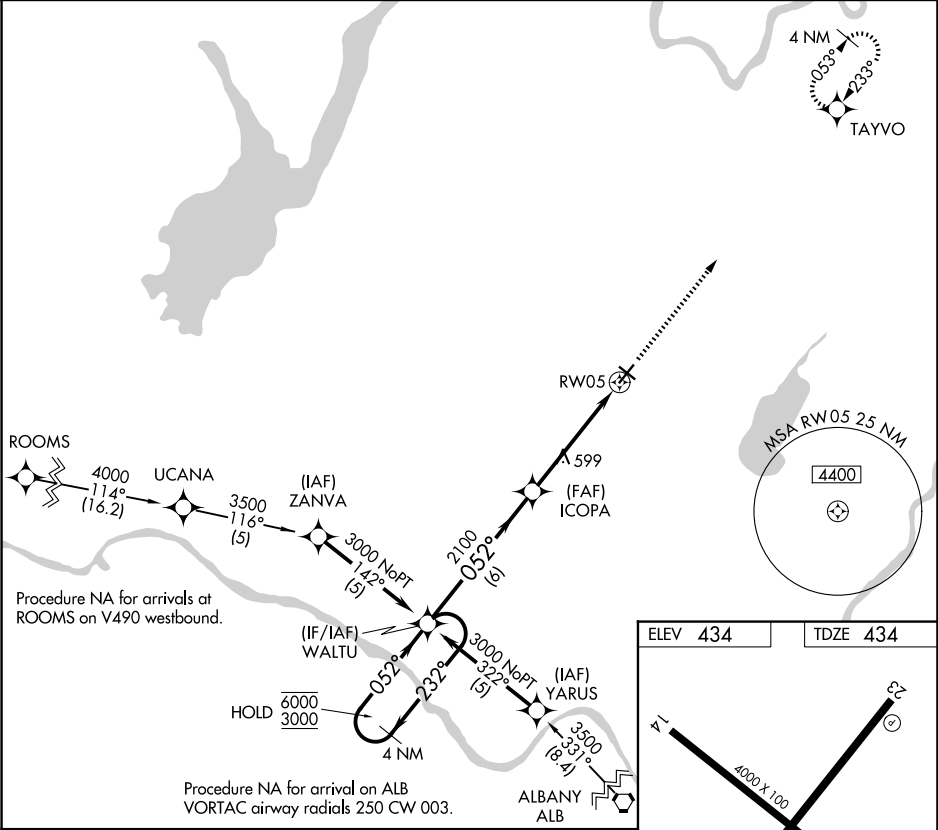

4 NM Holding Pattern WALTU

6000  
3000

← 232°  
052° →

052°

ICOPA

2100

3.04°  
TCH 46

6 NM

5 NM

3000

TAYVO

RW05

ELEV 434

TDZE 434

14

4000 X 100

4699 X 100

052°

32

|          |       |             |           |                 |
|----------|-------|-------------|-----------|-----------------|
| CATEGORY | A     | B           | C         | D               |
| LNAV MDA | 860-1 | 426 (500-1) | 860-1 1/4 | 426 (500-1 1/4) |

MIRL Rwy 5-23 0

MIRL Rwy 14-32

REIL Rwys 5 and 23 0