


LILLS THREE DEPARTURE (RNAV)

RNAV 1 - DME/DME/IRU or GPS.	TOP ALTITUDE: 3000	CHARLOTTE DEP CON 120.05 257.2 ASOS 135.725 CLNC DEL 127.2 UNICOM (CTAF) 123.0
RADAR required.		

TAKEOFF MINIMUMS
Rwys 3, 21: Standard.

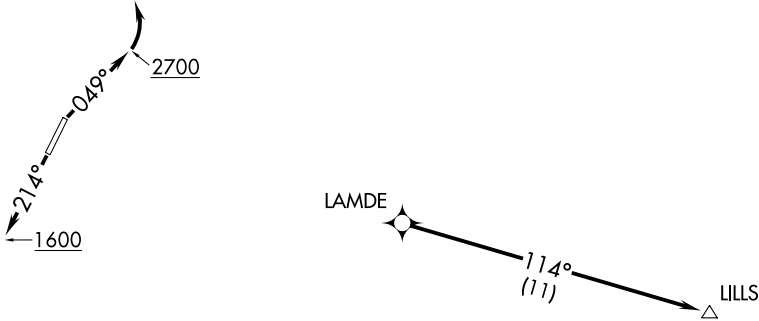

- NOTE: For turbo jets only.
NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 3: Climb on heading 049° to 2700 before turning left, then on heading assigned by ATC, thence. . . .
TAKEOFF RUNWAY 21: Climb on heading 214° to 1600 before proceeding north, then on heading assigned by ATC, thence. . . .
. . . . on RADAR vectors to LAMDE, then on depicted route to LILLS. Maintain 3000. Expect clearance to filed altitude within 10 minutes after departure.