

WAAS
CH **77809**
W16A

APP CRS
163°

Rwy Idg **4301**
TDZE **1803**
Apt Elev **1803**


RNAV (GPS) RWY 16

AURORA MUNI/AL POTTER FLD (AUH)

Baro-VNAV NA when using Grand Island altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Grand Island altimeter setting and increase all DA 41 feet and all MDA 60 feet and LPV all Cats visibility ¼ mile. VDP NA when using Grand Island altimeter setting.

MISSED APPROACH:
Climb to 3400 direct EBWIX and hold.

AWOS-3 121.225	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

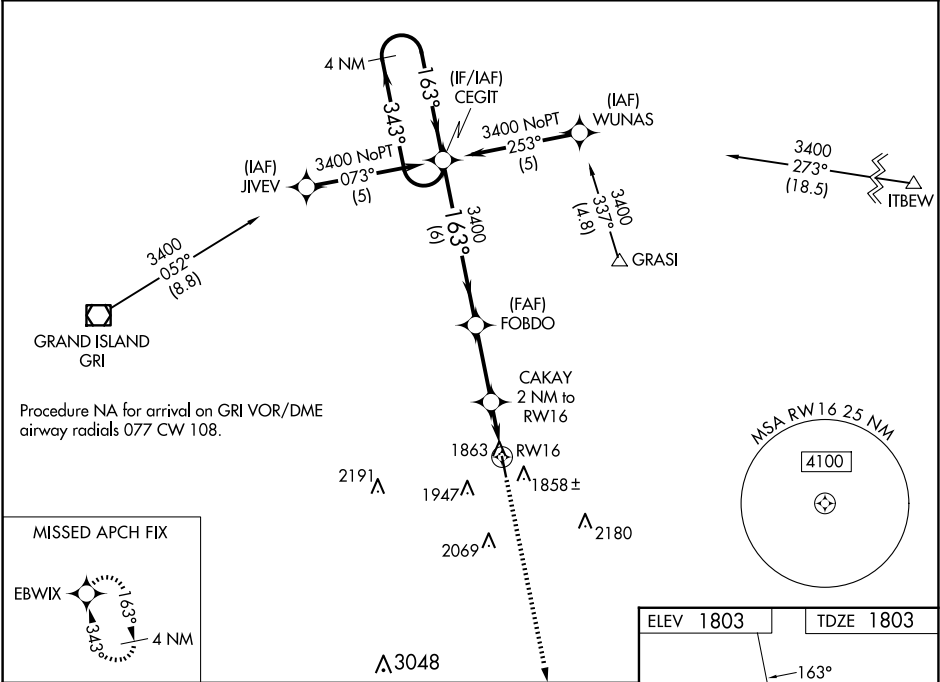

4 NM Holding Pattern

CEGIT

FOBDO

CAKAY 2 NM to RW16

RW16

EBWIX

GP 3.00°
TCH 40

GP 3.00°
TCH 40

GP 3.00°
TCH 40

GP 3.00°
TCH 40

GP 3.00°
TCH 40

6 NM

2.8 NM

1 NM

1 NM

CATEGORY

A

B

C

D

LPV DA

2102-1

299 (300-1)

NA

LNAV/VNAV DA

2133-1¼

330 (400-1¼)

NA

LNAV MDA

2160-1

357 (400-1)

NA

CIRCLING

2300-1
497 (500-1)

2340-1
537 (600-1)

NA

ELEV 1803

TDZE 1803

163°

91

4301 X75

1852±

34

MIRL Rwy 16-34 0