

WAAS CH 86539 W25A	APP CRS 253°	Rwy Idg TDZE Apt Elev	6501 5140 5176
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25

ROOSEVELT MUNI (74V)


⚠

NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 48°C (119°F). Baro-VNAV and VDP NA when using Vernal altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Vernal altimeter setting: increase LPV DA to 5466 and visibility 1⁄8 SM, LNAV/VNAV DA to 5628 and visibility 1⁄4 SM; increase all MDAs 80 feet and LNAV visibility Cat C and D 1⁄8 SM and Circling Cat C visibility 1⁄4 SM.

MISSED APPROACH: Climb to 5700 then climbing left turn to 10500 direct IGEHU and hold, continue climb-in-hold to 10500.

AWOS-3P 118.975	SALT LAKE CENTER 135.77 257.7	UNICOM 122.8 (CTAF) 1
---------------------------	---	---------------------------------

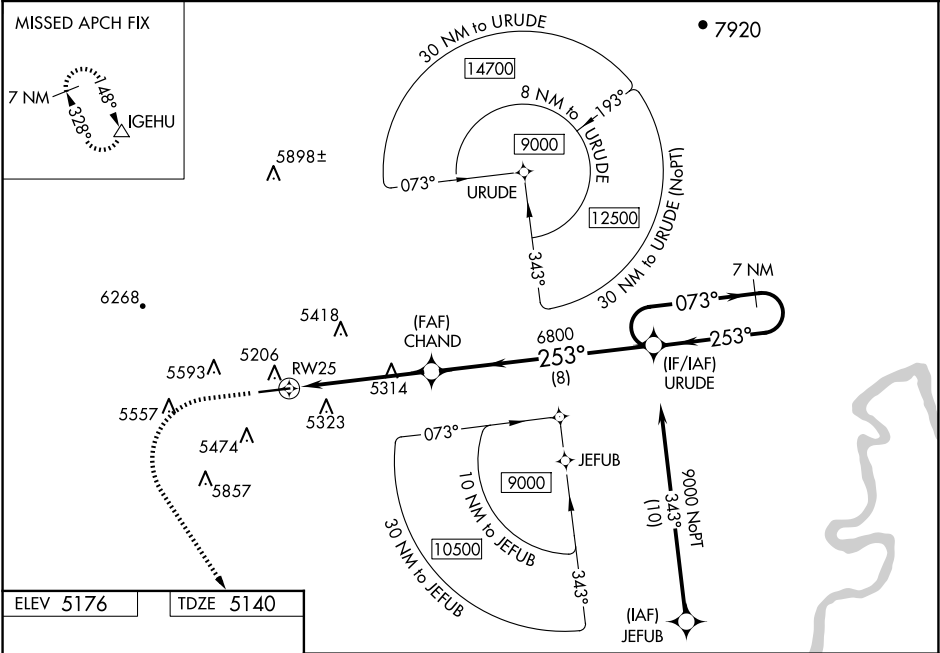

ELEV 5176	TDZE 5140
-----------	-----------

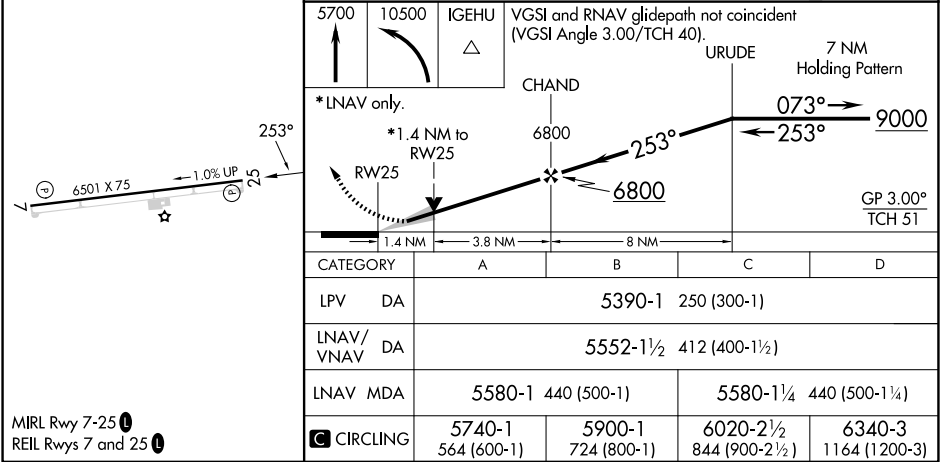

MIRL Rwy 7-25 1
REIL Rwy 7 and 25 1