WAAS CH 49209 W06A	APP CRS 060°	Rwy Ldg 5001 TDZE 33 Apt Elev 33

RNAV (GPS) RWY 6
FLAGLER EXEC (FIN)

RNP APCH-GPS.

Circling NA to Rwys 18W and 36W. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 6 helicopter visibility reduction below ¾ SM NA. Circling Rwy 11, 24 NA at night.

MISSED APPROACH: Climb to 2300 direct GACDE and hold.

ATIS	DAYTONA APP CON	FLAGLER TOWER ★	GND CON	UNICOM
128.325	125.8 269.075	118.95 (CTAF) L	121.75	123.0

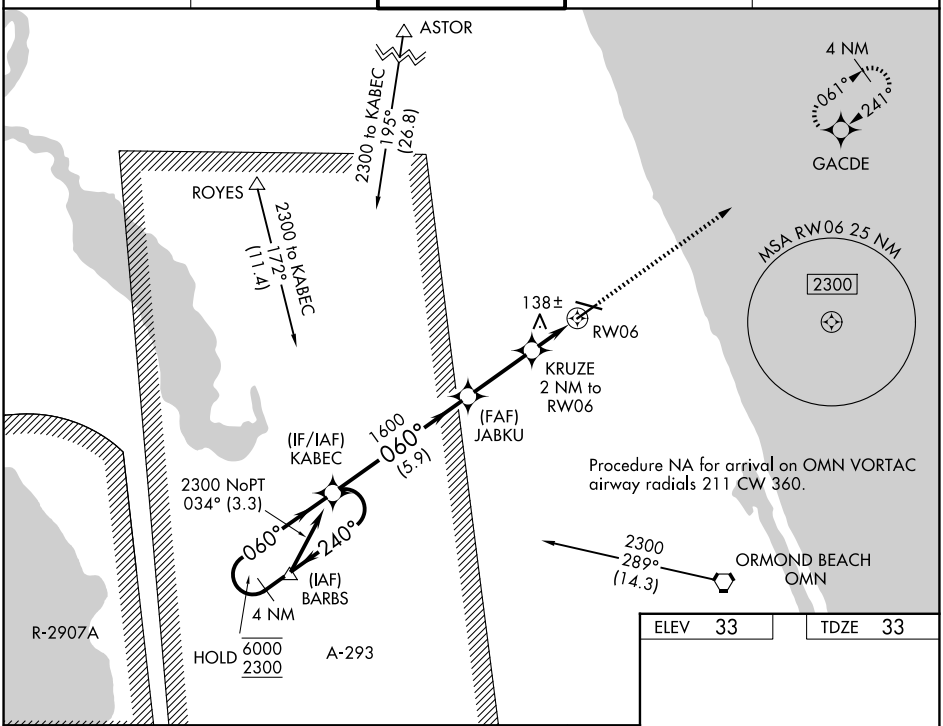

ELEV 33	TDZE 33

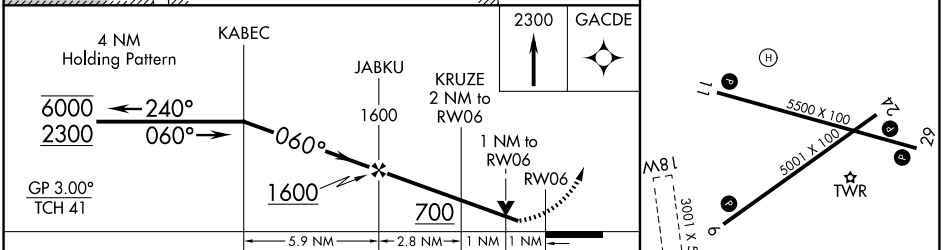

CATEGORY	A	B	C	D
LPV DA	312-⅞ 279 (300-⅞)			
LNAV/VNAV DA	292-¾ 259 (300-¾)			
LNAV MDA	400-1 367 (400-1)			
CIRCLING	500-1 467 (500-1)		760-2 727 (800-2)	760-2¼ 727 (800-2¼)

REIL Rwys 6, 11, 24, and 29 L
MIRL Rwys 6-24 and 11-29 L

SE-3, 22 JAN 2026 to 19 FEB 2026

SE-3, 22 JAN 2026 to 19 FEB 2026