


ANCHORAGE CENTER
125.35 346.3
COLD BAY RADIO
122.3
CTAF
122.3

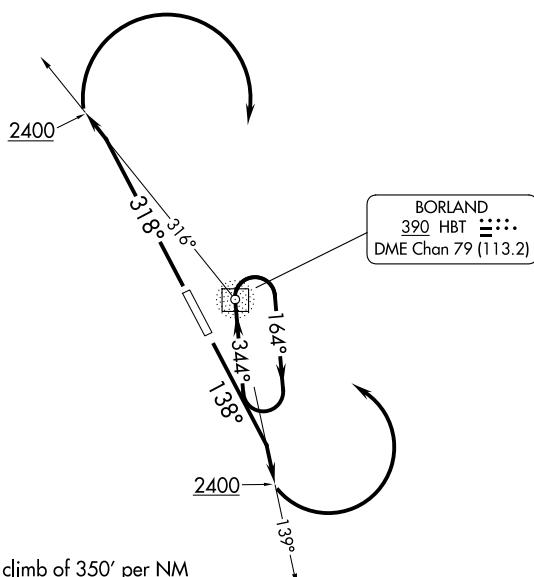

NOTE: ADF required.

TAKEOFF MINIMUMS

Rwy 14: Standard.

Rwy 32: Standard with minimum climb of 350' per NM to 1200, or 2600-3 for VCOA.

TAKEOFF OBSTACLE NOTES

Rwy 32: Ships beginning 1493' from DER, crossing extended runway centerline, 100' MSL.

Vegetation beginning 1.4 NM from DER, 392' right of centerline, up to 6' AGL/256' MSL.

Vegetation, terrain beginning 1.5 NM from DER, 534' right of centerline, up to 296' MSL.

Vegetation beginning 1.6 NM from DER, 995' right of centerline, up to 7' AGL/315' MSL.

Terrain, vegetation beginning 1.7 NM from DER, on and left of centerline, up to 410' MSL.

Vegetation beginning 1.7 NM from DER, 1493' right of centerline, up to 6' AGL/351' MSL.

Vegetation beginning 1.9 NM from DER, 161' right of centerline, up to 7' AGL/401' MSL.

Terrain, vegetation beginning 2 NM from DER, 326' right of centerline, up to 456' MSL.

Vegetation 2.1 NM from DER, 2753' right of centerline, 5' AGL/478' MSL.

Terrain, vegetation beginning 2.2 NM from DER, 388' right of centerline, up to 619' MSL.

Terrain 2.5 NM from DER, 1994' right of centerline, 472' MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 14: Climb on heading 138° to intercept bearing 139° from HBT NDB to 2400 then climbing left turn direct HBT NDB, thence. . . .

TAKEOFF RUNWAY 32: Climb on heading 318° to intercept bearing 316° from HBT NDB to 2400 then climbing right turn direct HBT NDB, or for VCOA, cross Sand Point Airport at or above 2500, thence. . . .

VCOA RUNWAY 32: Obtain ATC approval for VCOA when requesting IFR clearance.

Climb in visual conditions to cross Sand Point Airport at or above 2500 then climb direct HBT NDB, thence. . . .

. . . . continue climb in HBT NDB holding pattern to 10000 before proceeding on course.