
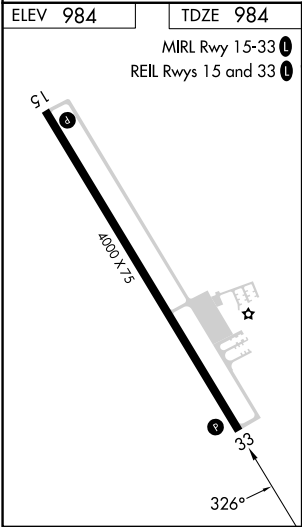


WAAS CH 45520 W33A	APP CRS 326°	Rwy Ldg 4000 TDZE 984 Apt Elev 984
--	------------------------	---

RNAV (GPS) RWY 33
BRENNER FLD (FNB)

RNP APCH - GPS	MISSED APPROACH: Climb to 3000 direct COVUT and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV NA when using AFK altimeter setting. When local altimeter not received, use AFK altimeter setting and increase LPV DA to 1338 and LNAV/VNAV DA to 1380, increase all MDAs 120 feet.	

ASOS 119.275	ST JOSEPH APP CON ★ 120.35 360.8	UNICOM 122.8 (CTAF) 1
------------------------	--	---------------------------------

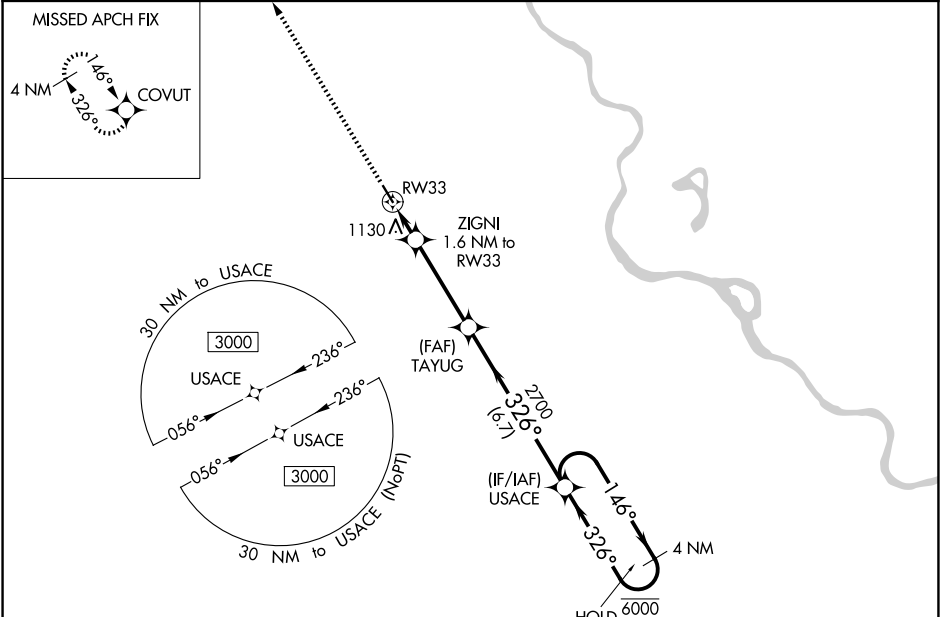

ELEV 984	TDZE 984	MIRL Rwy 15-33 1				REIL Rwy 15 and 33 1			
3000	COVUT	TAYUG				USACE 4 NM Holding Pattern			
		ZIGNI 1.6 NM to RW33		2700		146° → 6000		← 326° 3000	
		RW33		1520		GP 3.00°		TCH 40	
		1.6		3.7 NM		6.7 NM			
CATEGORY	A	B	C	D					
LPV DA	1234-1	250 (300-1)	NA						
LNAV/VNAV DA	1276-1	292 (300-1)	NA						
LNAV MDA	1380-1	396 (400-1)	NA						
CIRCLING	1560-1	576 (600-1)	NA						