

WAAS CH 99310 W18B	APP CRS 179°	Rwy Ldg TDZE 55 Apt Elev 55
--	------------------------	---


RNAV (GPS) Z RWY 18

PICAYUNE MUNI (MJD)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).
Baro-VNAV and VDP NA when using Stennis Intl altimeter setting. DME/DME RNP-0.3 NA.
Helicopter visibility reduction below 3/4 SM NA. Procedure NA when R-4403 B, C, or E is active.
When local altimeter setting not received, used Stennis Intl altimeter setting: increase LPV DA to 377 and visibility all Cats 1/8 mile; increase LNAV/VNAV DA to 621 and visibility all Cats 1/8 mile; increase all MDA 40 feet and Circling Cat C visibility 1/4 mile.

MISSED APPROACH:
Climb to 1200, then climbing right turn to 1800 direct CIQYI and hold.

AWOS-3PT 119.075	GULFPORT APP CON★ 124.6 354.1	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

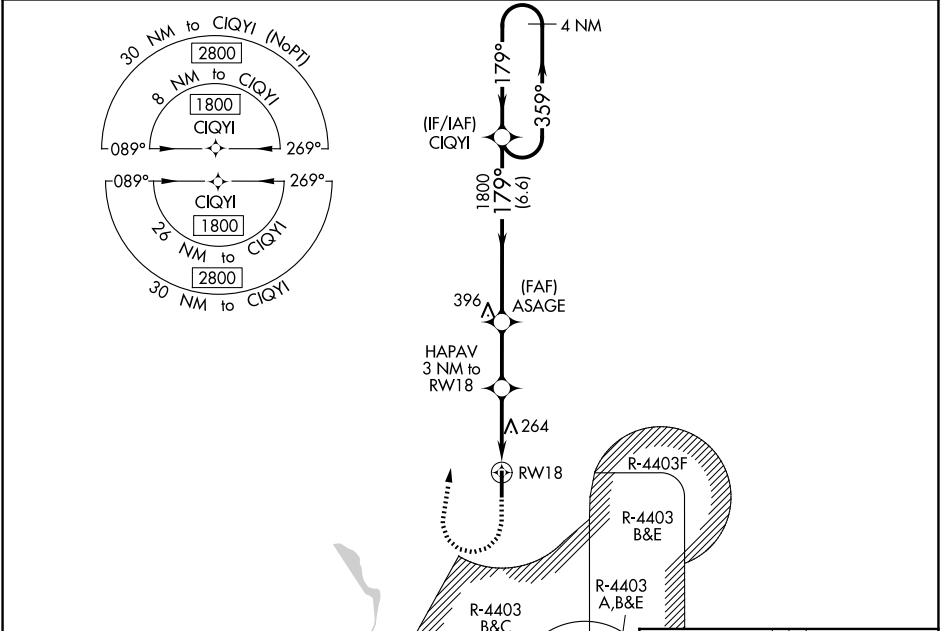

		ELEV 55		TDZE 55	
		179°			
		81			
		36			
		MIRL Rwy 18-36 0			
		GP 3.00° TCH 36			
		4 NM Holding Pattern			
		1800 ← 359° → 179° → 1800			
		ASAGE 1800			
		HAPAV 3 NM to RW18			
		*1.3 NM to RW18			
		*1040			
		RW18			
		*LNAV only.			
		6.6 NM → 2.4 NM → 1.7 NM → 1.3 NM			
CATEGORY		A	B	C	D
LPV DA		343-1		288 (300-1)	
LNAV/ VNAV DA		587-1 ⁷ / ₈		532 (600-1 ⁷ / ₈)	
LNAV MDA		520-1	465 (500-1)	520-1 ³ / ₈	465 (500-1 ³ / ₈)
CIRCLING		520-1 465 (500-1)	580-1 525 (600-1)	700-1 ³ / ₄ 645 (700-1 ³ / ₄)	960-3 905 (1000-3)