

WAAS CH 78328 W11A	APP CRS 107°	Rwy Idg TDZE Apt Elev	4713 408 408
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 11

MILLINOCKET MUNI (MLT')

RNP APCH.


▼


▲

Baro-VNAV NA when using Houlton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 41°C. Rwy 11 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Houlton altimeter setting and increase all DA and MDA 120 feet; increase LPV and LNAV/VNAV visibility all Cats ½ SM and LNAV visibility Cat B ¼ SM and Cat C/D ½ SM. Procedure NA at night.

MISSED APPROACH:
Climb to 2300 direct JEBIV and hold.

ASOS 135.225	BOSTON CENTER 120.25 346.4	UNICOM 122.8 (CTAF) 
------------------------	--------------------------------------	---

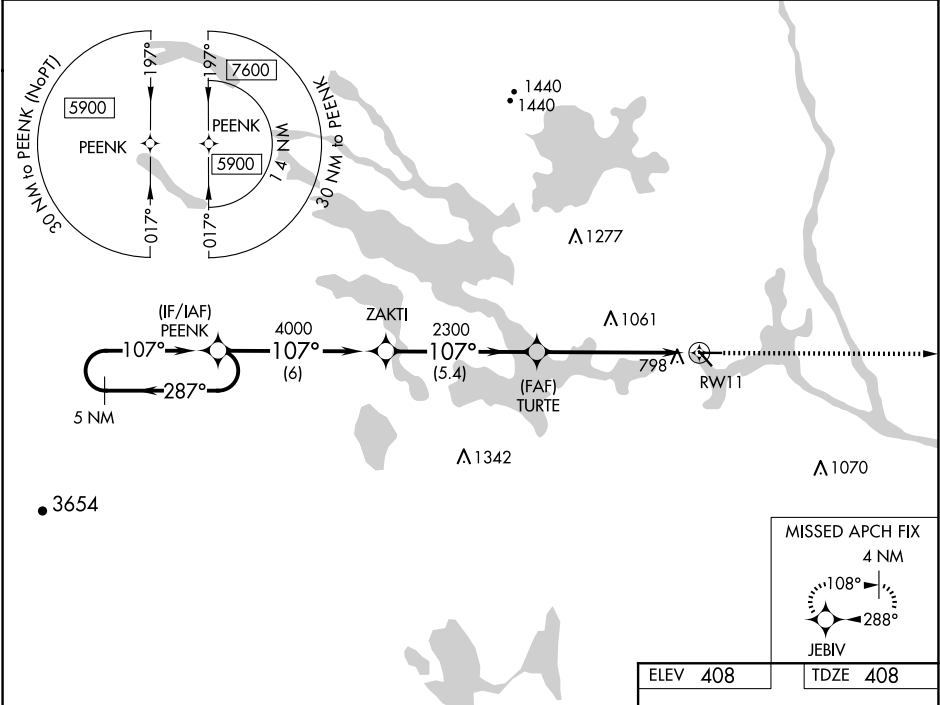

5 NM Holding Pattern		2300 JEBIV	
5900 ← 287° → 107°			
GP 3.00° TCH 51		ELEV 408 TDZE 408	
PEENK		ZAKTI	
4000		TURTE	
2300		RW11	
6 NM		5.4 NM	
5.8 NM		4713 X 99	
4000 X 100		0.3% UP	
CATEGORY	A	B	C
LPV DA	929-134 521 (600-134)		
LNAV/VNAV DA	1004-2 596 (600-2)		
LNAV MDA	1100-1 692 (700-1)	1100-2 692 (700-2)	
REIL Rwy 29 		MIRL Rwy 11-29 	