

WAAS CH 69212 W25A	APP CRS 252°	Rwy Idg TDZE 913 Apt Elev 913	4703 913 913
--	------------------------	---	---

RNAV (GPS) RWY 25

FLEMING-MASON (F'GX')


RNP APCH - GPS.

▼


Baro-VNAV and VDP NA when using Blue Grass altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1240 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1290 feet and all visibilities ¼ SM; increase all MDAs 140 feet and LNAV visibility Cat C/D ⅜ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH:
Climb to 3000 direct
DIKRY and hold.

AWOS-3 118.125	INDIANAPOLIS CENTER 124.225 360.725	UNICOM 123.0(CTAF) 0
--------------------------	---	--------------------------------

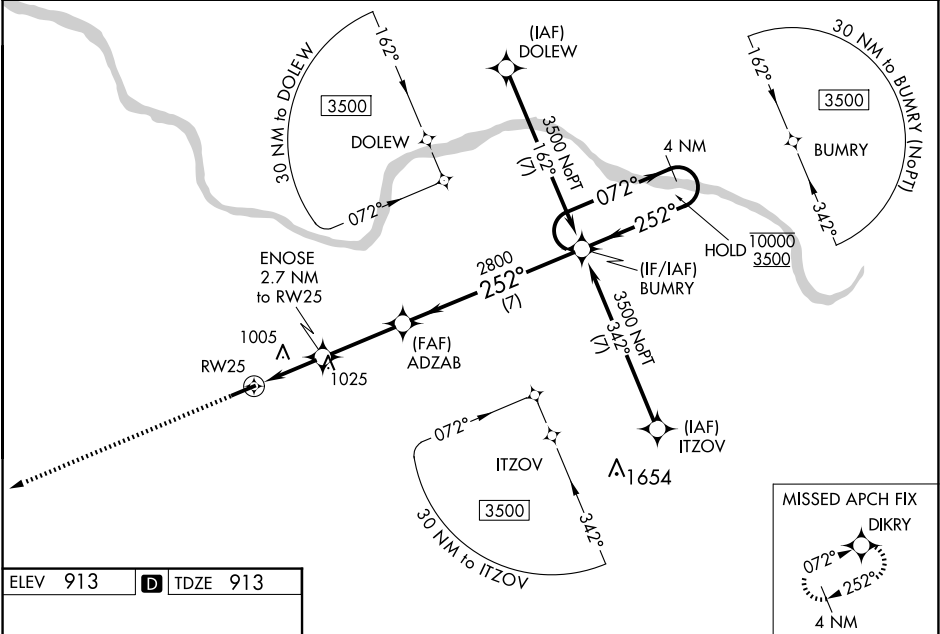

ELEV 913	D	TDZE 913
----------	----------	----------

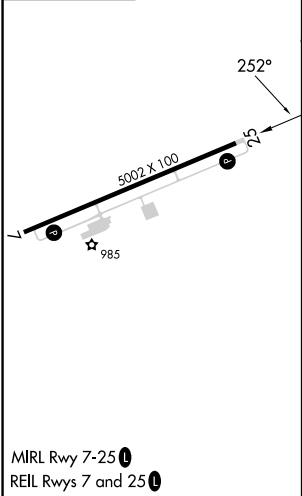

3000 ↑ DIKRY		ADZAB 2800		BUMRY 4 NM Holding Pattern	
ENOSE 2.7 NM to RW25		1 NM to RW25		2800	
RW25		1800		252°	
1 NM		1.7 NM		3.1 NM	
7 NM		10000		3500	
GP 3.00°		TCH 40			
CATEGORY	A	B	C	D	
LPV DA	1113-¾	200 (200-¾)			
LNAV/VNAV DA	1163-¾	250 (300-¾)			
LNAV MDA	1260-1	347 (400-1)			
CIRCLING	1320-1 407 (500-1)	1380-1 467 (500-1)	1520-1¾ 607 (700-1¾)	1520-2 607 (700-2)	

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026