

LOC I-MQJ 108.7	APP CRS 252°	Rwy Ldg TDZE Apt Elev	6005 860 862
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 25


INDIANAPOLIS RGNL (MQJ)

NA When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, increase S-LOC 25 Cats C/D visibility 1/2 mile and Circling Cat D visibility 1/4 mile.



MALSRL 

MISSED APPROACH: Climb to 1400 then climbing left turn to 2400 on SHB VOR/DME R-334 to SHB VOR/DME and hold.

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	UNICOM 122.975 (CTAF) 0
----------------------------	---	-----------------------------------

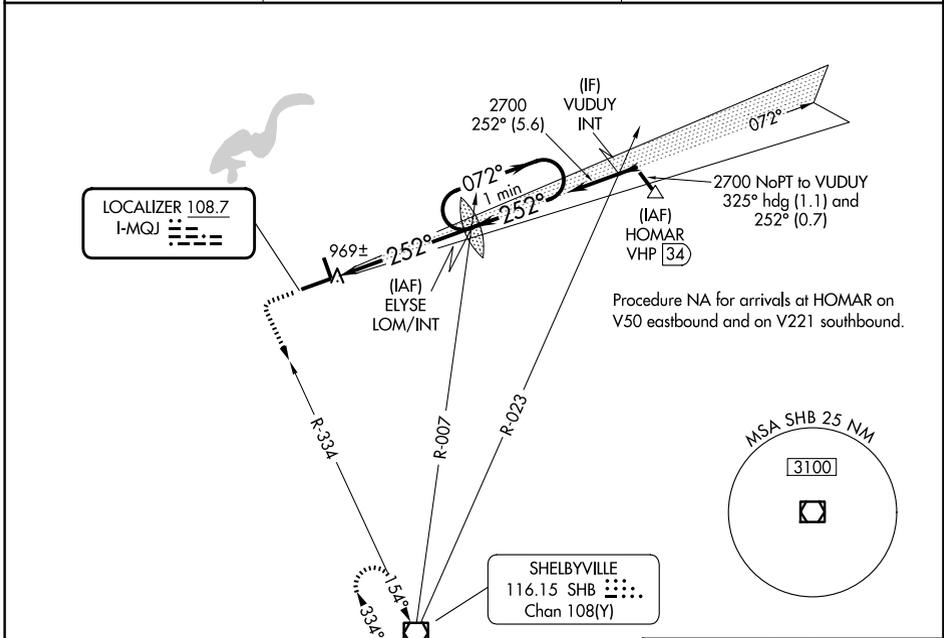

ELEV 862	TDZE 860
----------	----------

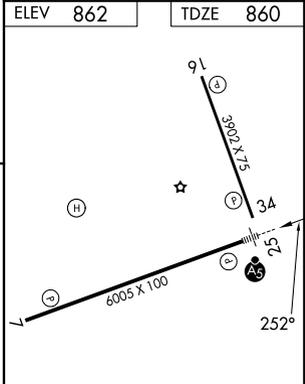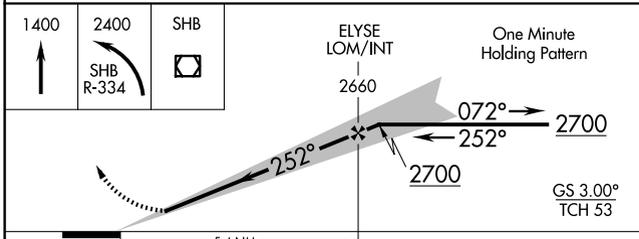

CATEGORY	A	B	C	D
S-ILS 25	1060-1/2 200 (200-1/2)			
S-LOC 25	1220-1/2	360 (400-1/2)	1220-5/8	360 (400-5/8)
CIRCLING	1340-1	478 (500-1)	1360-1/2	1660-2/2
			498 (500-1/2)	798 (800-2/2)

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026