

WAAS CH <b>56310</b> <b>W25A</b>	APP CRS <b>252°</b>	Rwy Ldg <b>6005</b> TDZE <b>860</b> Apt Elev <b>862</b>
--	------------------------	---

# RNAV (GPS) RWY 25

INDIANAPOLIS RGNL (MQJ)



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Indianapolis Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, and increase all visibilities ½ SM. When using Indianapolis altimeter setting inoperative table does not apply. For inoperative ALS, increase LPV all Cats visibility to 1 SM.

**MALS**




**MISSED APPROACH:**  
Climb to 2900 direct RAPBO and on track 143° to SHB VOR/DME and hold.

AWOS-3PT <b>124.175</b>	INDIANAPOLIS APP CON <b>127.15 317.8</b>	UNICOM <b>122.975 (CTAF) ①</b>
----------------------------	---	-----------------------------------

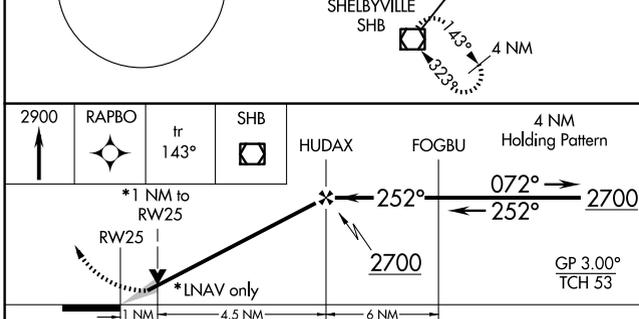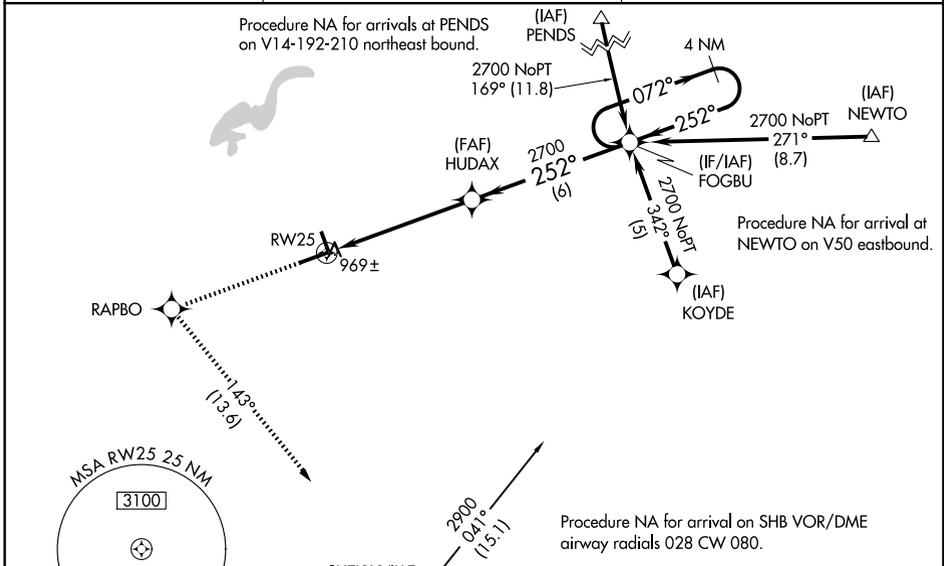

CATEGORY	A	B	C	D
LPV DA		1160-½	300 (300-½)	
LNAV/VNAV DA		1259-¾	399 (400-¾)	
LNAV MDA	1220-½	360 (400-½)	1220-⅝	360 (400-⅝)
CIRCLING	1340-1	478 (500-1)	1360-1½	1660-2½
			498 (500-1½)	798 (800-2½)

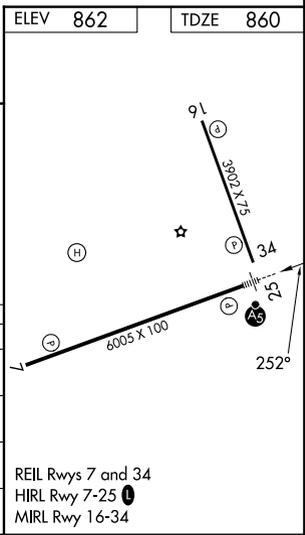

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026