

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 14 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct TRDLL and hold, continue climb-in-hold to 3000.

AWOS-3PT 118.975	TALLAHASSEE APP CON ★ 128.7 254.3	UNICOM 122.7 (CTAF) 0
---------------------	--------------------------------------	--------------------------

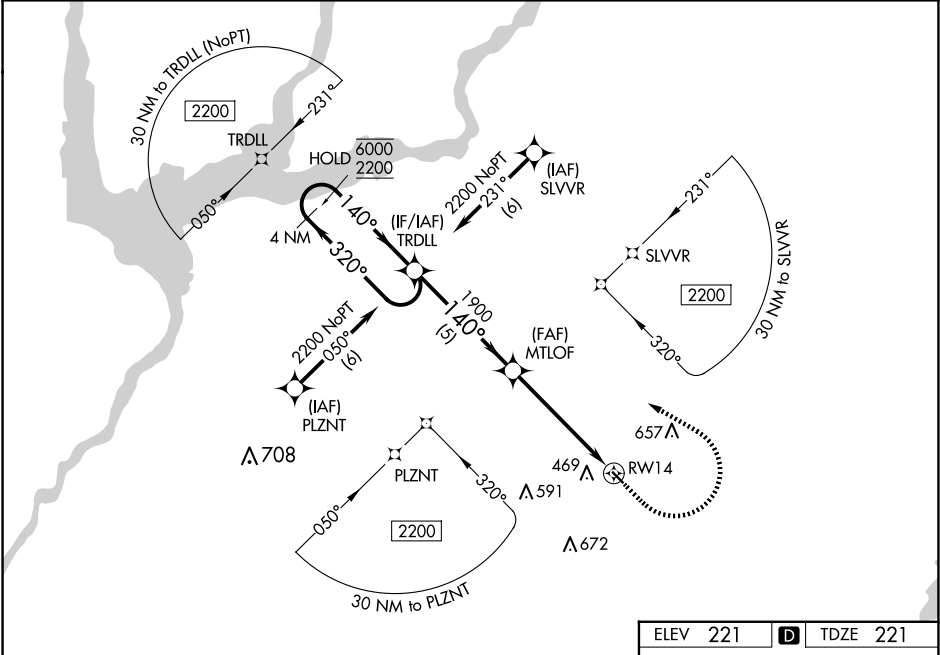

VGSI and RNAV glidepath not coincident (VGSI 3.00°/TCH 20).

4 NM Holding Pattern

6000 2200

GP 3.00° TCH 40

TRDLL

MTLOF

1900

1.6 NM to RWY 14

RWY 14

5 NM 3.5 NM 1.6 NM

CATEGORY	A	B	C	D
LPV DA	501-7½	280 (300-7½)		NA
LNAV/VNAV DA	793-1½	572 (600-1½)		NA
LNAV MDA	760-1	539 (600-1)	760-1½ 539 (600-1½)	NA
CIRCLING	780-1 559 (600-1)	800-1 579 (600-1)	960-2 739 (800-2)	NA

ELEV 221 D TDZE 221

TRDLL

140°

2871 X 25

0.63 UNO

MRL Rwy 14-32 0